


W and Z Boson reconstruction at CLIC

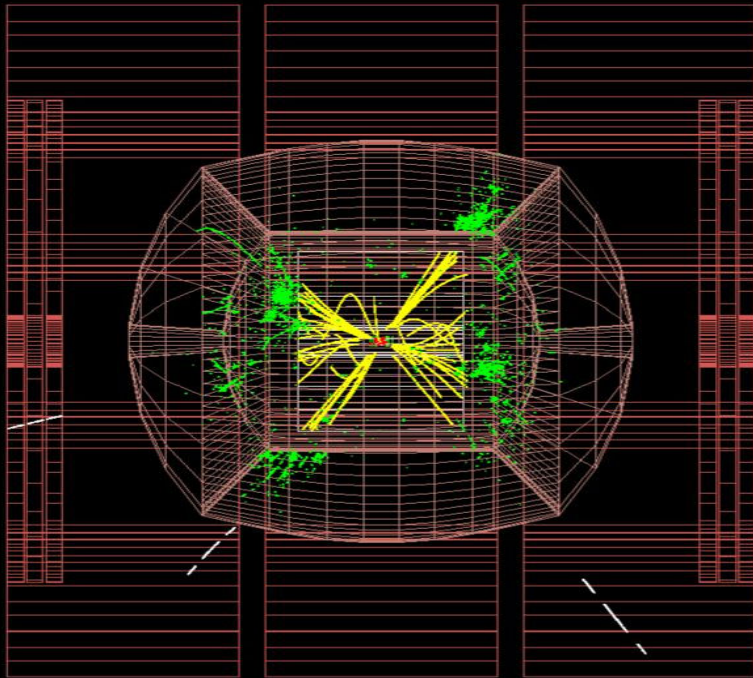

Corrado Gatto
INFN Napoli/Lecce
On behalf of the
4th Concept Collaboration

The 4th Concept Collaboration

4th Letter of Intent

Patrick Le Du

DAPNIA/SPP, 91191 Gif sur Yvette, France

Vito Di Benedetto, Franco Grancagnolo, Corrado Gatto, Fedor Ignatov,
Anna Mazzacane, Alessandro Micoli, Giovanni Tassielli, Giuseppina Terracciano
Università & INFN di Lecce, via Arnesano, 73100 Lecce, Italy

Antonio Lamberto, Gaetana Francesca Rappazzo, Ada Anania
INFN di Messina, 98100 Messina, Italy

Gianluca Introzzi

Università di Pavia, via Bassi 6, 27100 Pavia, Italy

Franco Bedeschi, Roberto Carosi, Marco Incagli, Fabrizio Scuri
INFN di Pisa, Largo Bruno Pontecorvo 3, 56127 Pisa, Italy

Walter Bonvicini, Aldo Penzo, Irina Rashevskaya, Erik Vallazza, Gianluca Zampa
INFN di Trieste, Padriciano 99, 34012 Trieste, Italy

D. Cauz, C. Delpapa, G. Pauletta, M. Rossi, L. Santi
Università di Udine & INFN di Trieste, Viale delle Scienze, 33100 Udine, Italy

Kazuhiko Hara

High Energy Physics Laboratory, Institute of Physics, University of Tsukuba, Tsukuba, Ibaraki 305, Japan

Tae Jeong Kim, Hyeongsung Lee, Kyong Sei Lee, Minhee Lee, Sung Keun Park, Sungjoon Yoon
Department of Physics, Korea University, Seoul 136-701, Korea

Sorina Popescu, Laura Radulescu³

IFIN-HH, Bucharest, Romania

Fedor Ignatov, Boris Khazin, Alexander Popov, Alexander Ruban, Yury Yudin
Budker Institute of Nuclear Physics, 11 Prospect Lavrentyeva, Novosibirsk, 630090, Russia

Stanislav Tokar

Faculty of Mathematics, Physics and Informatics, Comenius University, 842 48 Bratislava, Slovakia

Jaroslav Antos

Institute of Experimental Physics, Watsonova 47, 043 53 Kosice, Slovakia

Sezen Sekmen, Efe Yaşgan², Mehmet Zeyrek

Physics Department, Middle East Technical University, Ankara, Turkey

S.I. Bondarenko, A.N. Omelyanchuk, A.A. Shablo, N.S. Scherbakova, N.M. Levchenko
Institute for Low temperature Physics and Engineering, Kharkov, Ukraine

Alexander Mikhailichenko

Cornell University, Ithaca, NY 14853-5001 USA

Muzaffer Atac, Marcel Demarteau, Dmitri Denisov, Ingrid Fang, Stephen R. Hahn,
Caroline Milstene, Masa Mishina, Adam Pars, Robert Wands, Hans Wenzel, Ryuji Yamada, G.P. Yeh
Fermi National Accelerator Laboratory, Batavia, IL 60510 USA

Anatoli Frishman, John Hauptman, Jerry Lamss,

Started @ Snowmass
8 / 2005

140 Members
33 Institutions
15 Countries

Detector Design Guidelines for studies at CLIC

- Alternative design
 - No PFA for Calorimetry
 - No TPC for Central Tracking
 - No range-based Muon Detector
- Low material budget in front of the Calorimeter at small angles
- Light -> no iron
 - Easier push-pull operation
 - Probabaly the only way to go for future, high field magnets (iron saturate)
- Open mind toward the choice of technology
 - Define a baseline configuration
 - Work in parallel over (reasonable) alternatives
- Most of the work presented is transitional from ILC activities

Motivations for Baseline Configuration

- **Silicon Pixel Tracker (à la Damerell) with Forward Tracking Disks (modified SiLC design)**

- Fast timing
- Lowest material budget for $\theta < 45^\circ$
- High performance at small angles (for γ - γ separation)

Temporary version: talks with SiLC for R&D collaboration


- **Dual readout with time history of all channels**

- Resolution scales as $1/\sqrt{E}$ at all energies
- $\mathcal{O}(10^4)$ channels
- Cost

- **Dual Solenoid Muon Spectrometer**

- No iron
- Precise determination of particle momentum
- Tail catcher
- Independent calibration for the calorimeter (i.e. via $\mu \rightarrow \mu\gamma$)

An Alternative Detector for Physics Studies at CLIC

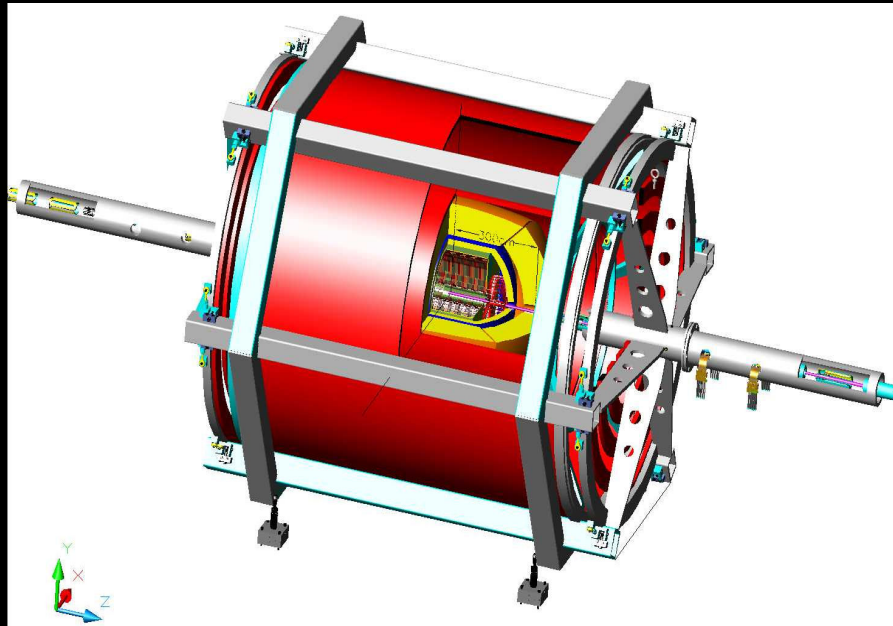


Modification of 4th Concept Detector for 3 TeV Physics

1. Vertex Detector 20-micron pixels
2. Silicon Tracker (preliminary version)
3. Forward Tracker Disks (preliminary version)
4. Double-readout calorimeter (specific implementation for CLIC)
5. Dual-solenoid with Muon Spectrometer


} Replaces a Drift Chamber

Beam Pipe and VXD layout

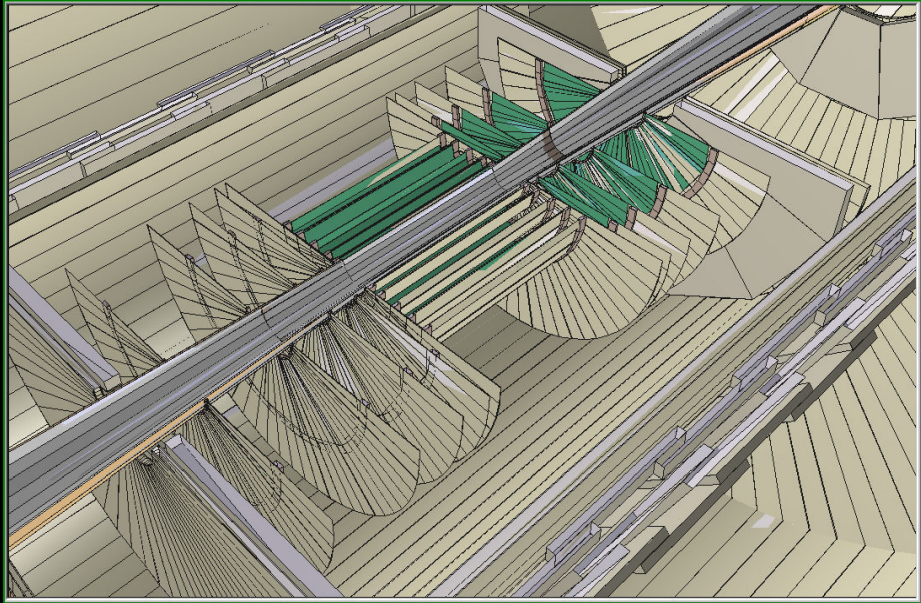

Includes:

1. Diffusion in Si
2. Cross talk
3. Gaussian noise
4. Electronic thresholds
5. Clusterization

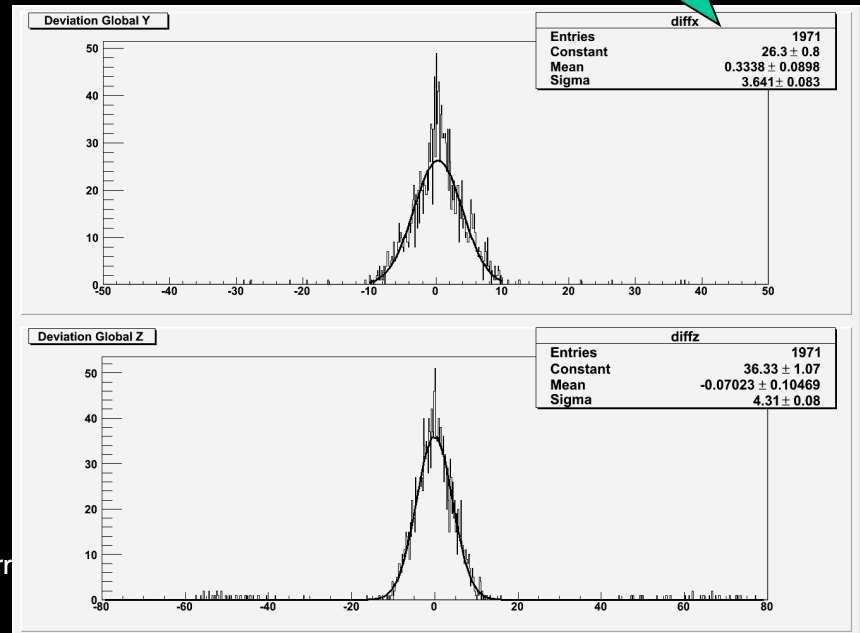

October 15th, 2009



CLIC09 - Cor

ILCRoot simulation


Si-Pixel Tracker + FTD

Preliminary version

- Same layout as Si Strip
- 100 μ m thickness Si detectors
- 50 μ m x 50 μ m pixels
- $\mathcal{O}(5 \times 10^{10})$ channels

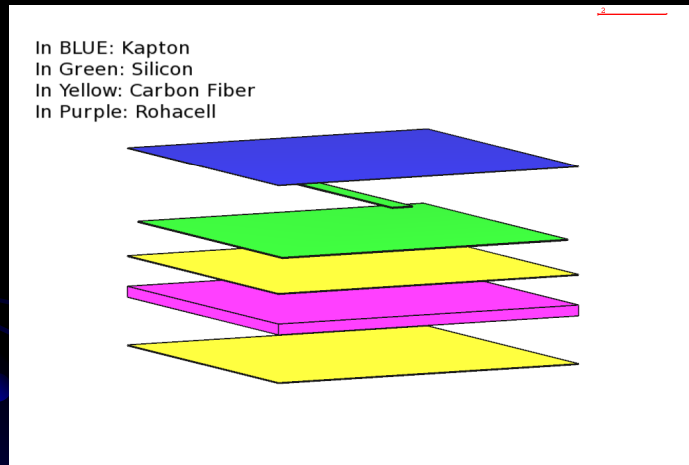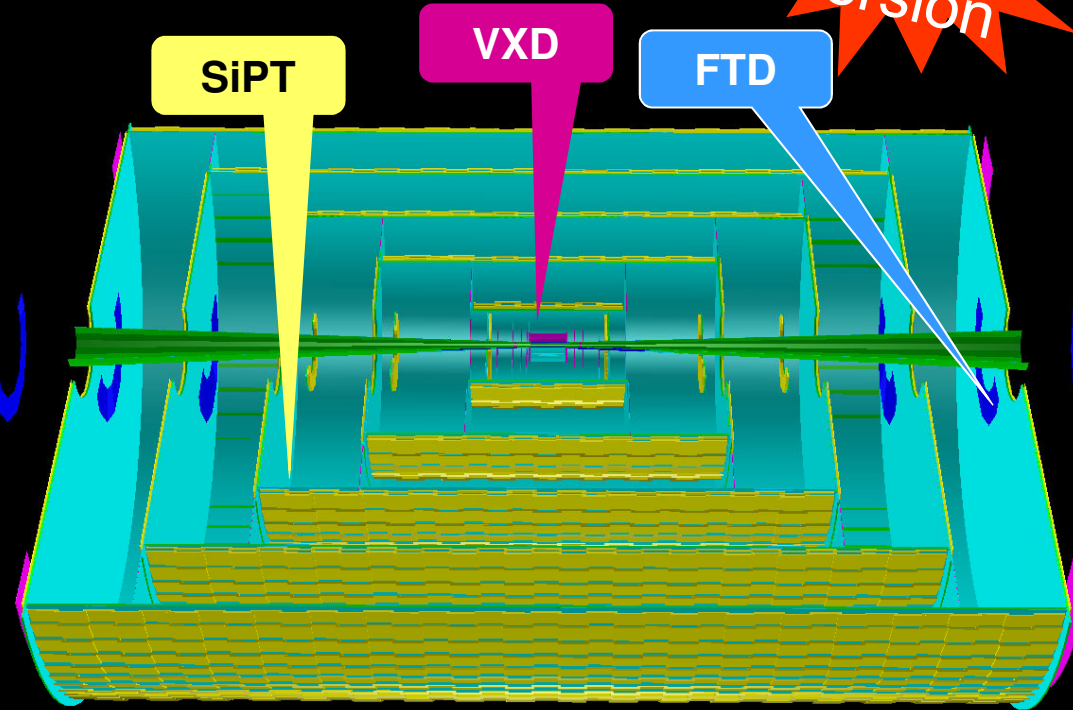

Barrel - 0.1mm steps

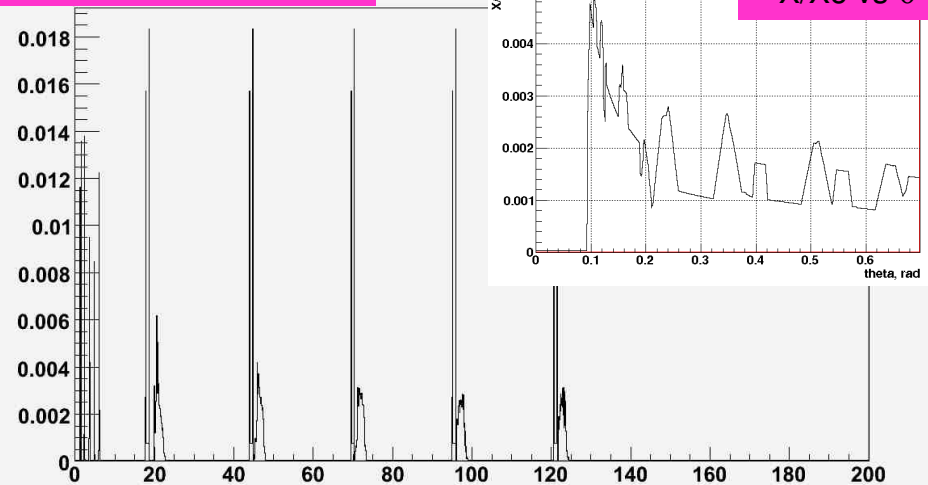

Si Pixel Tracker


- Barrel : 4.8% (Si= 2.6% + Support=2.2%)
- Endcap Inner Disks: 2.22 % X/X₀
- Endcap Outer Disks: 3.78-4.28% (with supports) X/X₀

October 15th, 2009

CLIC09 -

Event Display in ILCroot Tracking Systems

$e^+e^- \rightarrow 10$
muons
 $E_{\text{CM}} = 3 \text{ TeV}$
in Tracking
System

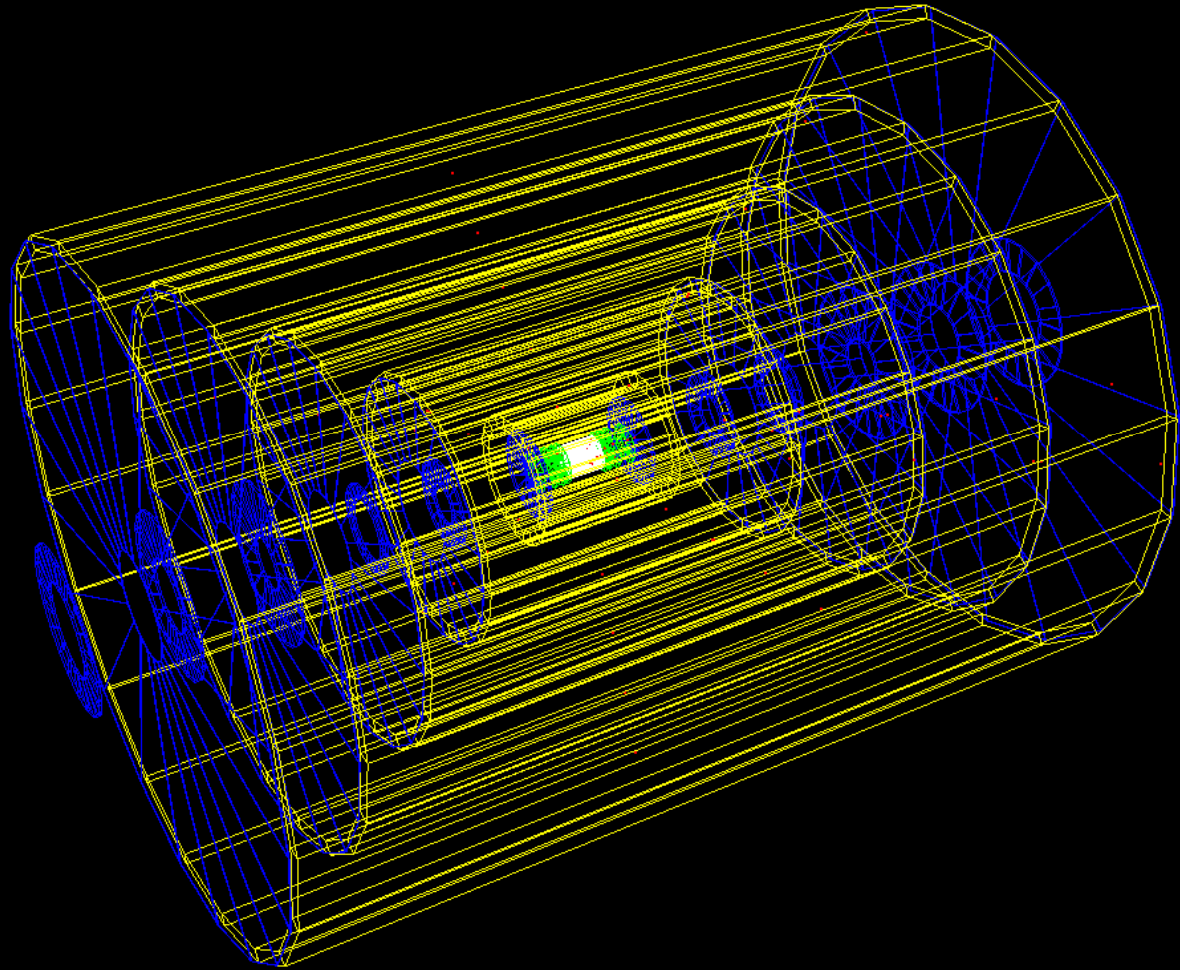

The 4th Concept Calorimeter

Hadronic Calorimeter

Cu + scintillating fibers + Čerenkov fibers

Fully projective layout


~1.4° aperture angle

~ 7.3 $\langle \lambda_{\text{int}} \rangle$ (Fibers)

Azimuth to 2.8°

Barrel: 16384 cells


Endcaps: 7450 cells

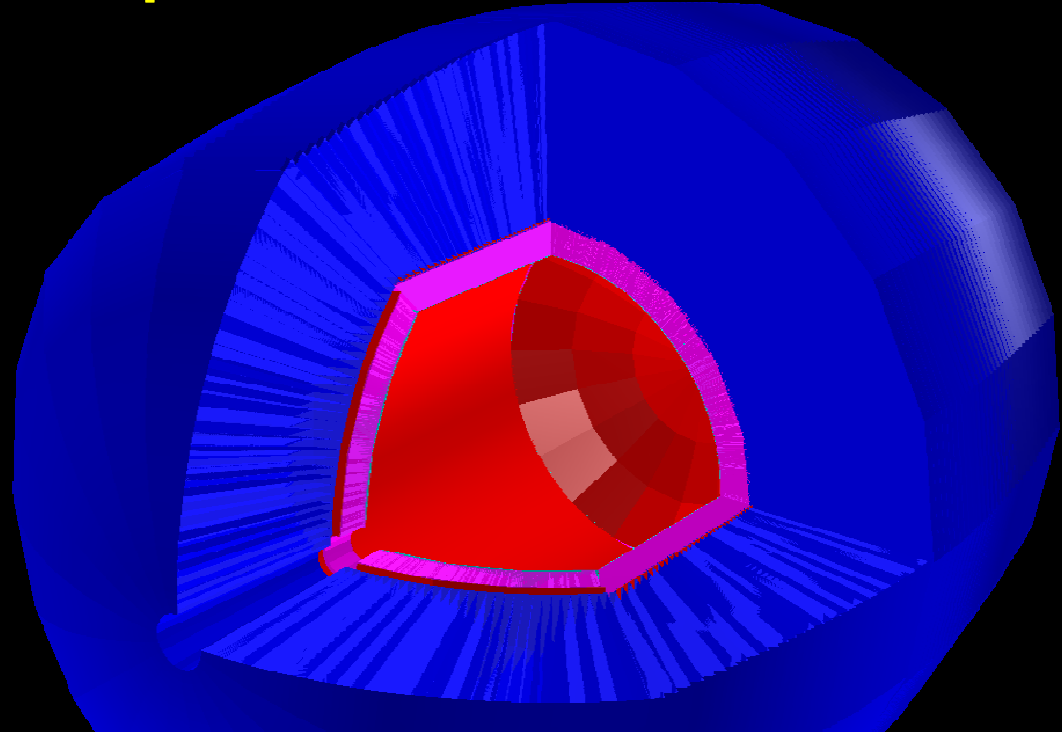

Electromagnetic Calorimeter


- BGO crystals for scintillating and Čerenkov light
- 2x2 crystals for each HCAL tower
- ~25 cm/22.7 X_0 depth and ~ 1 λ_{int} depth
- Barrel: 65536 cells
- Endcaps: 29800 cells

October 15th, 2009

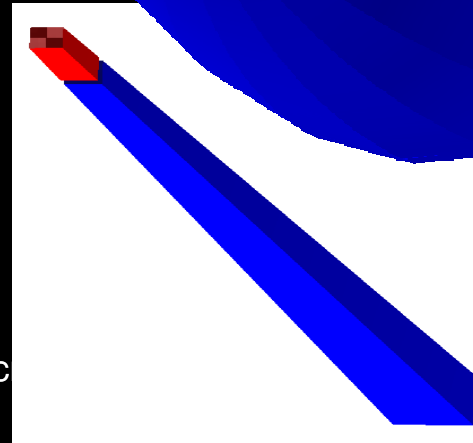

C

Hadronic Calorimeter Cells

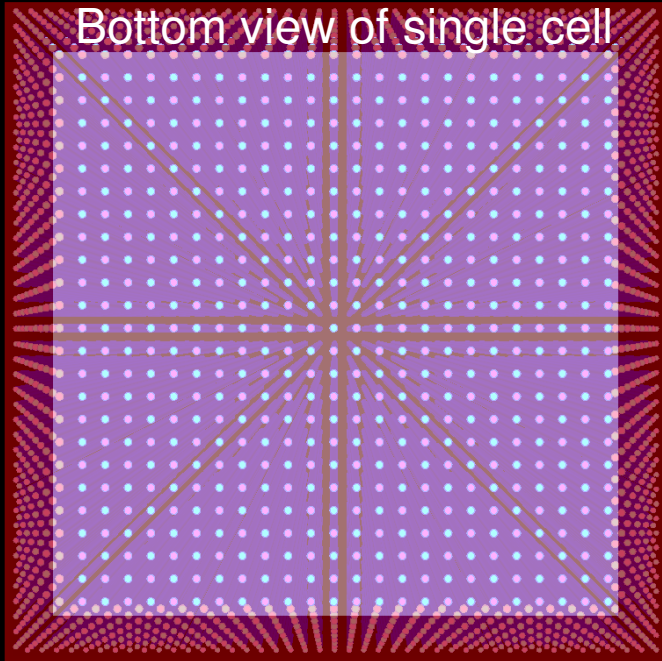

Prospective
view of
clipped cell

Top cell size: $\sim 8.1 \times 8.1 \text{ cm}^2$

1 mm diameter

Plastic/Quartz fibers

Aperture Number = 0.50

(C fibers)

Number of fibers inside each cell: ~ 1600
equally subdivided between Scintillating and
Cerenkov


Fiber stepping $\sim 2 \text{ mm}$

Cell length: 150 cm

Each tower works as two independent towers in the same


volume

Same
absorber/fiber
ratio as DREAM

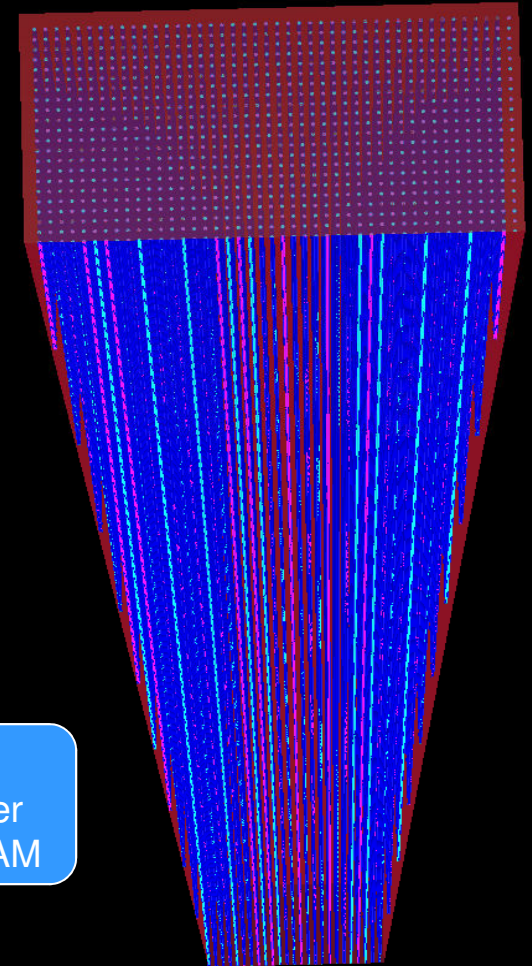

Bottom cell size: $\sim 4.4 \times 4.4 \text{ cm}^2$

Dual Solenoid B-field & Muon Spectrometer

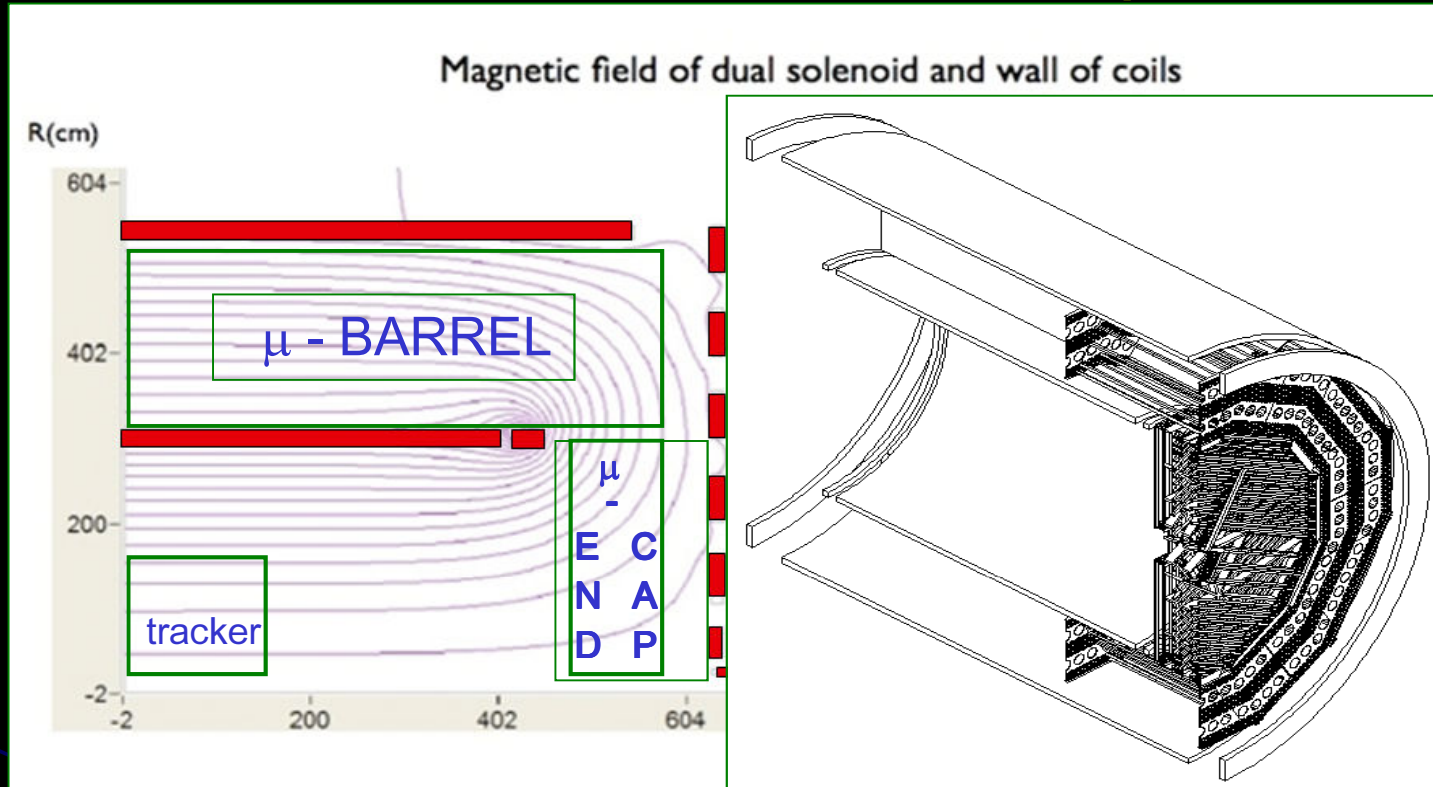

radius 2.3 cm
 filled with 90% He – 10% iC_4H_{10} @ NTP
 gas gain few $\times 10^5$
 total drift time 2 μs
 primary ionization 13 cluster/cm $\Rightarrow \approx 20$ electrons/cm total
 both ends instrumented with:

- > 1.5 GHz bandwidth
- 8 bit fADC
- > 2 Gsa/s sampling rate
- free running memory

for a

- fully efficient timing of primary ionization: **cluster counting**

October 5th, 2009 measurement of longitudinal position with charge division

- particle identification with dN_{cl}/dx

Barrel:

31500 tubes
 21000 channels
 840 cards



End caps:

8640 tubes
 9792 channels
 456 cards

Total:



40140 tubes
 30792 channels
 1296 cards

$\mu^+ \mu^-$ at 3.5 GeV/c

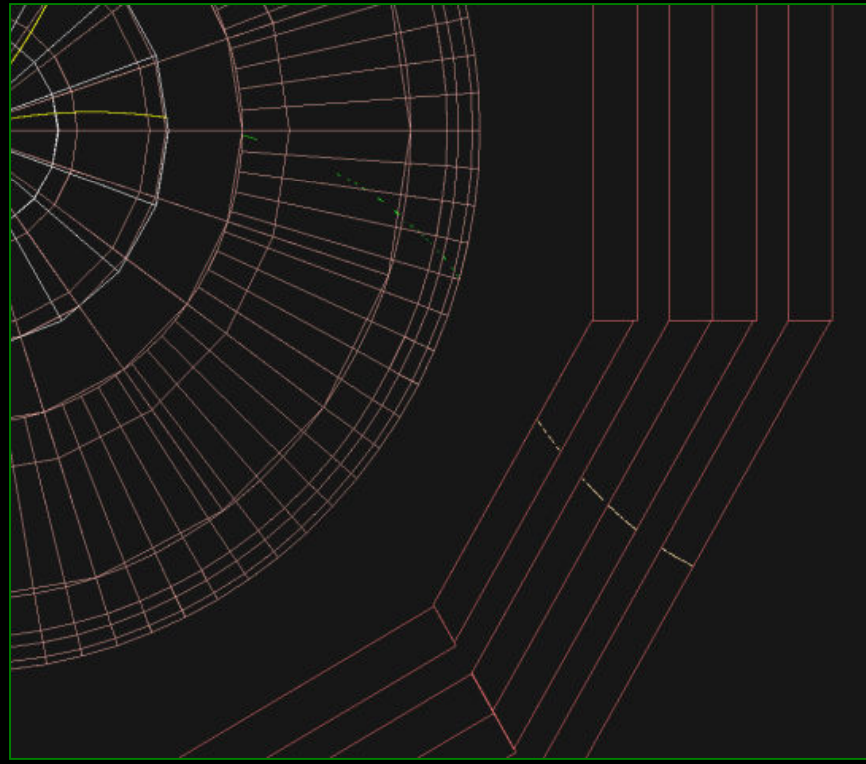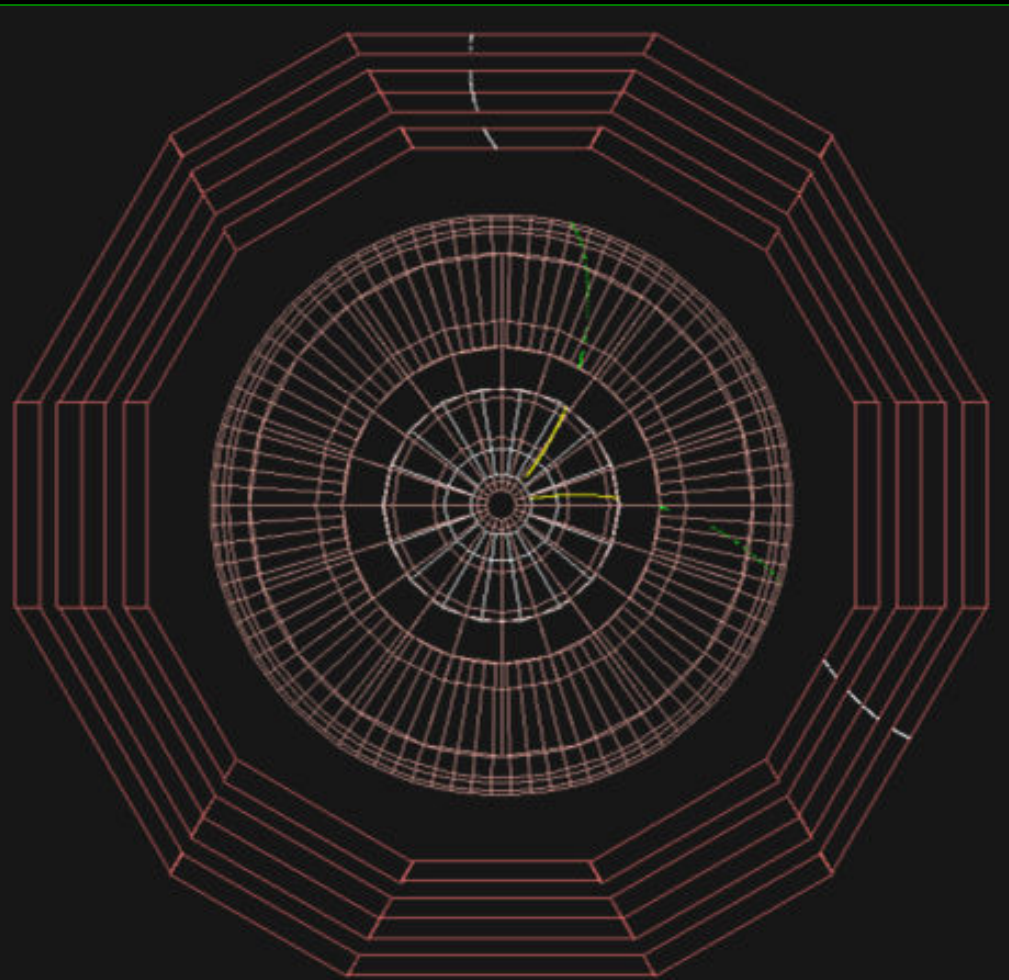

80 GeV jet with escaping particles

ILCRoot simulation

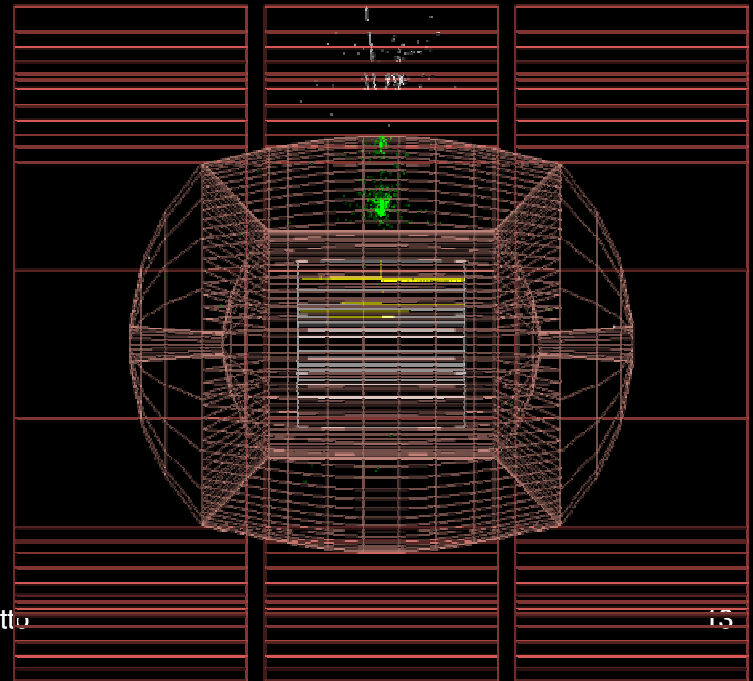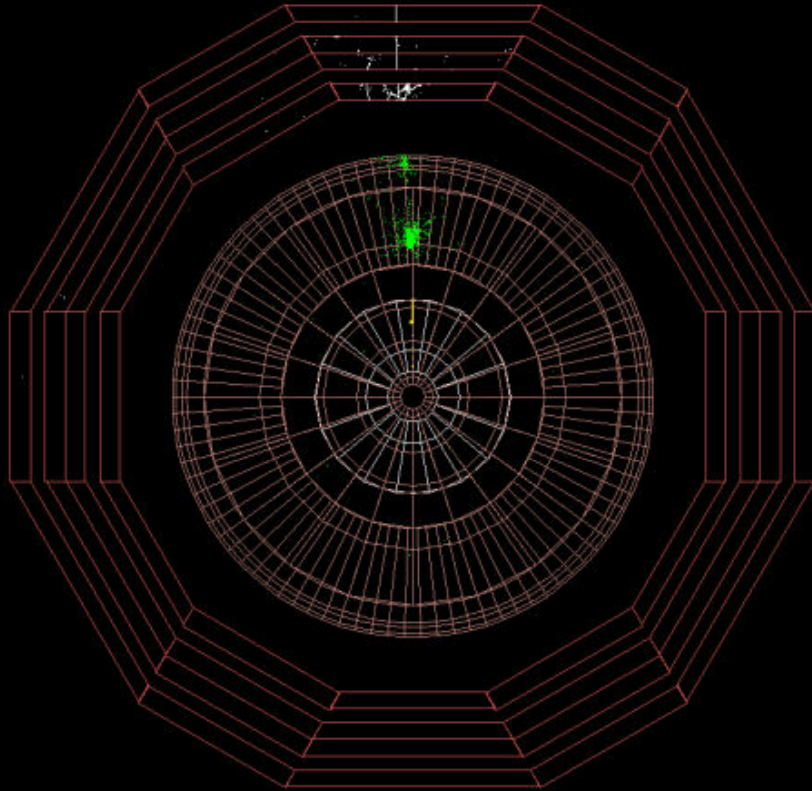


ILCroot: root Infrastructure for Large Colliders

- **CERN architecture based on root, VMC and Aliroot**
 - All ROOT tools are available (I/O, graphics, PROOF, data structure, etc)
 - Extremely large community of users/developers
- **Re-alignment with latest Aliroot version every 1-2 years (v4.17 release)**
- **It is a simulation framework and an Offline Systems:**
 - **Single framework, from generation to reconstruction through simulation. Don't forget analysis!!!**
 - It naturally evolves into the offline systems of your experiment
 - It is immediatly usable for test beams
 - Six MDC have proven robustness, reliability and portability
- **Main add-ons Aliroot:**
 1. Interface to external files in various format (STDHEP, text, etc.)
 2. Standalone VTX track fitter
 3. Pattern recognition from VTX (for si central trackers)
 4. Parametric beam background (# integrated bunch crossing chosen at run time)
- Growing number of experiments have adopted it: Alice (LHC), Opera (LNGS), (Meg), CMB (GSI), Panda(GSI), 4th Concept and **LHeC**

Simulation: full digitization + reconstruction


- Hits: produced by MC (G3,G4,Fluka)
- SDigits: simulate detector response for each hit
- Digits: merge digit from several files of SDigits (example Signal + Beam Bkgnd)
- Recpoints: Clusterize nearby Digits
- Pattern recognition + track fit through full Parallel Kalman Filter

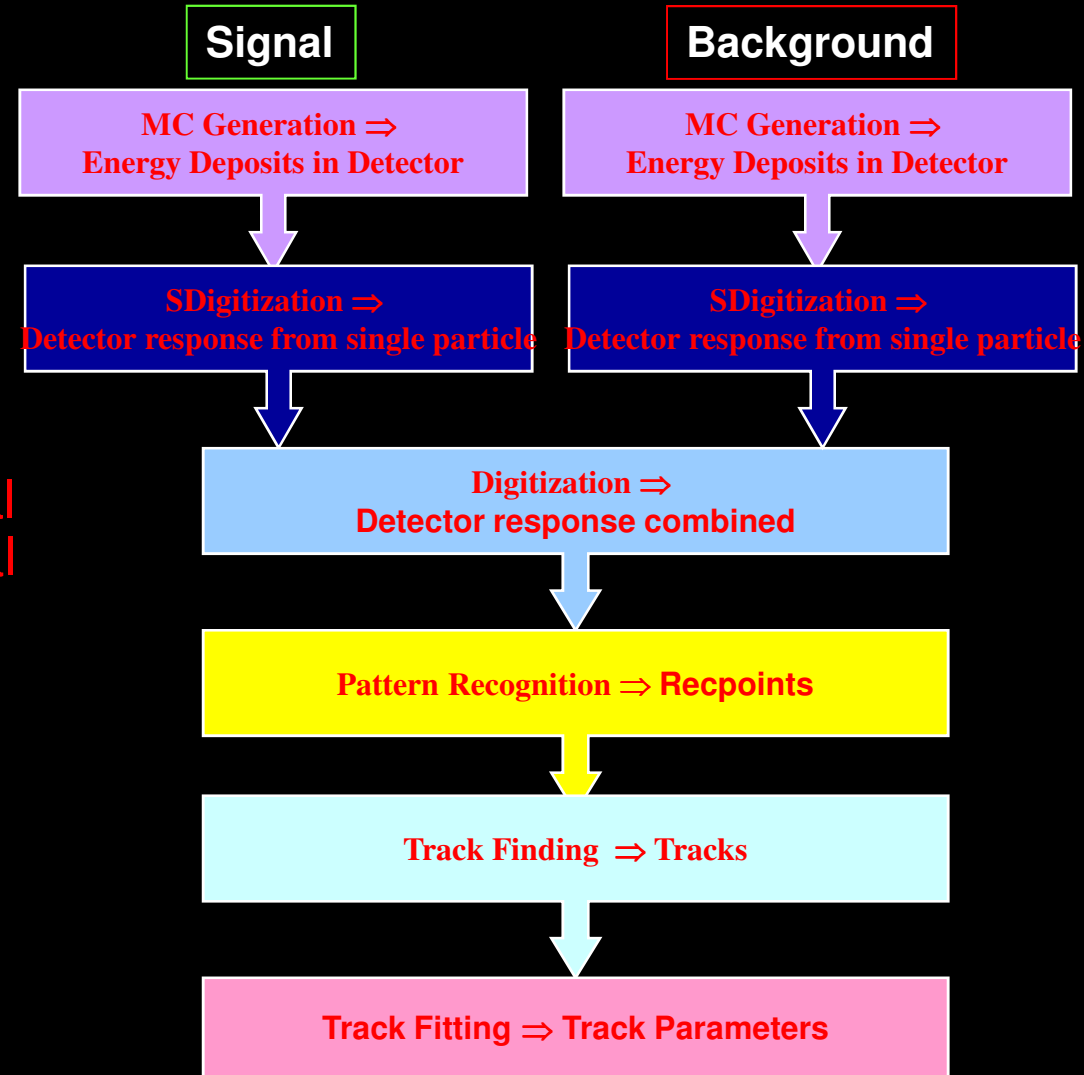

Single muons
No beam bkg

Tracking Performance


Preliminary
Version.
Talks in progress
with SiLC for
R&D on baseline
layout

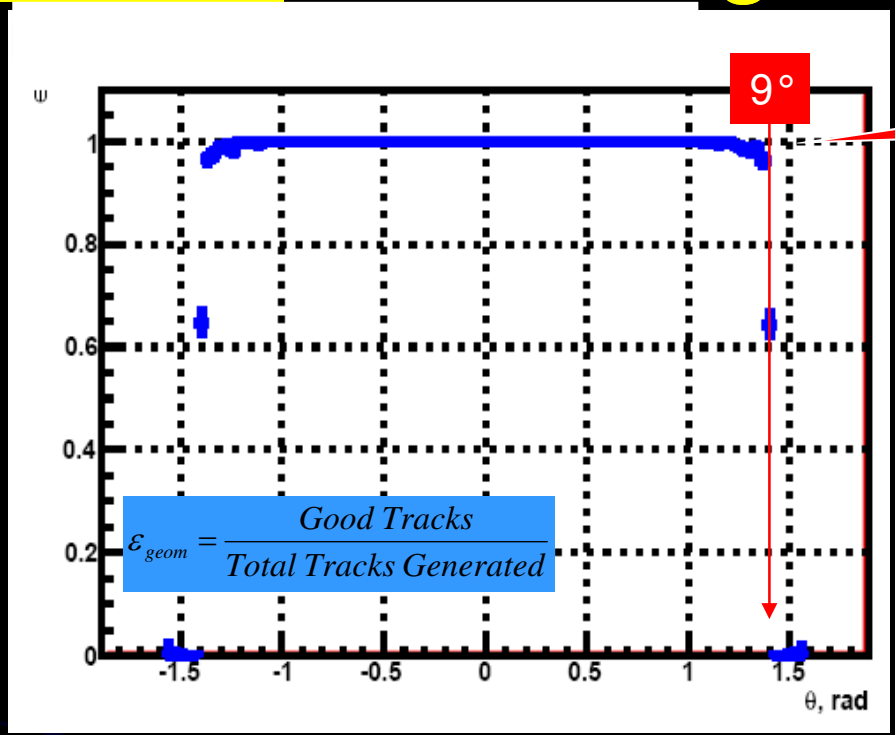

Geometrical
efficiency

Tracking
efficiency

- Defining "reconstructable tracks"
- I. DCA(true) < 3.5 cm
 - AND
 - II. At least 4 hits in VTX)

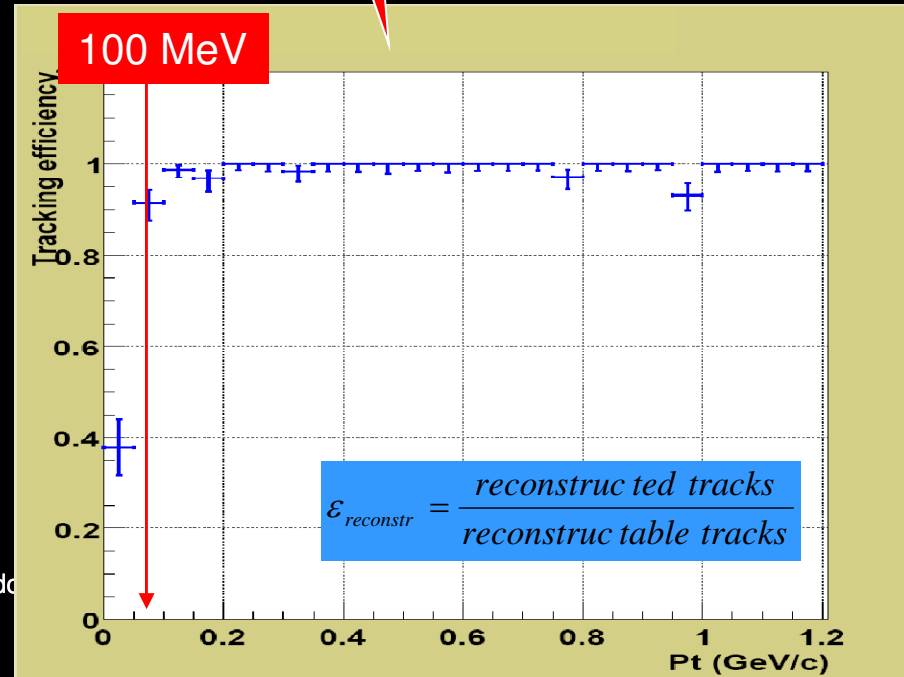






October 15th, 2009

CLIC09 - Corrado

M. Peccarisi

Single muons
No beam bkg

Tracking resolution vs P

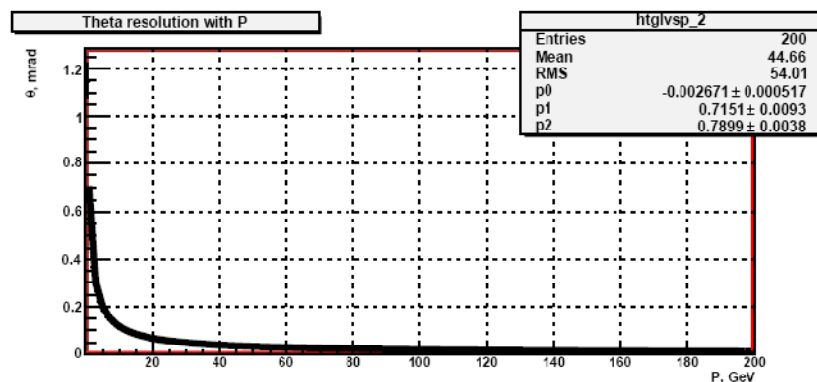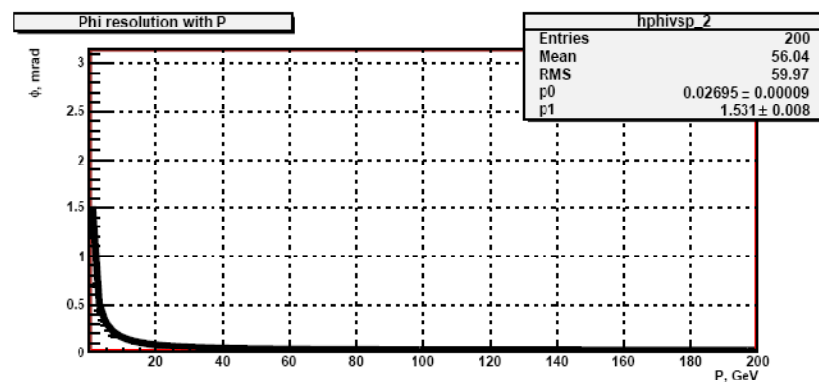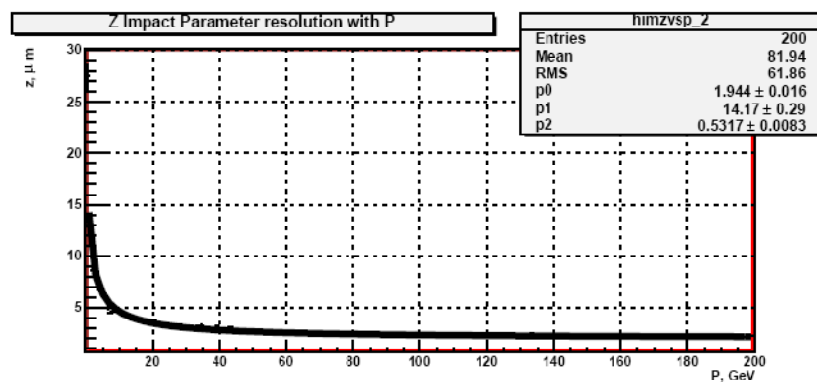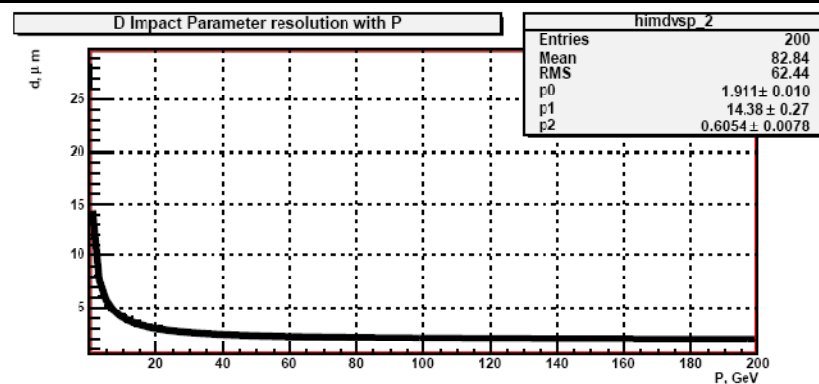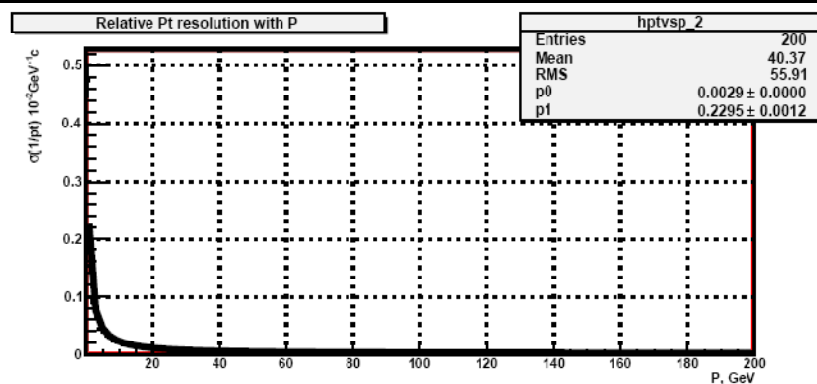

$$\sigma(P_t^{-1}) = 23 / P \oplus 0.29 \times 10^{-4} \text{ GeV}^{-1} c$$

$$\sigma(\vartheta) = 0.72 / P^{0.79} \oplus 0.002 \text{ mrad}$$





$$\sigma(\varphi) = 1.53 / P \oplus 0.027 \text{ mrad}$$

$$\sigma(D_o) = 14.4 / P^{0.61} \oplus 1.9 \mu m$$


$$\sigma(Z_o) = 14.2 / P^{0.53} \oplus 1.9 \mu m$$

Single muons
No beam bkg

Tracking resolution vs P

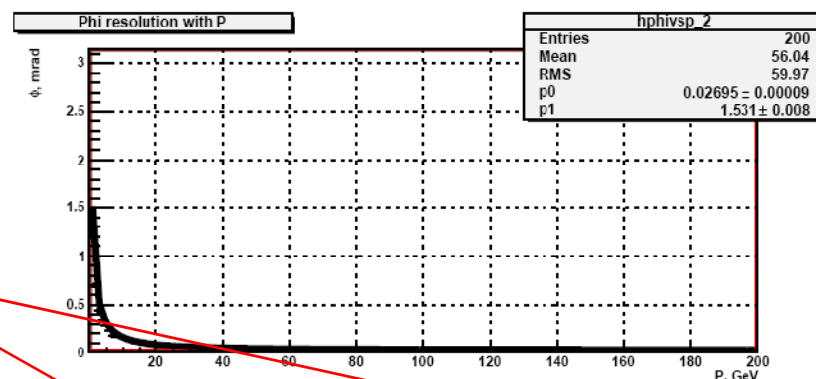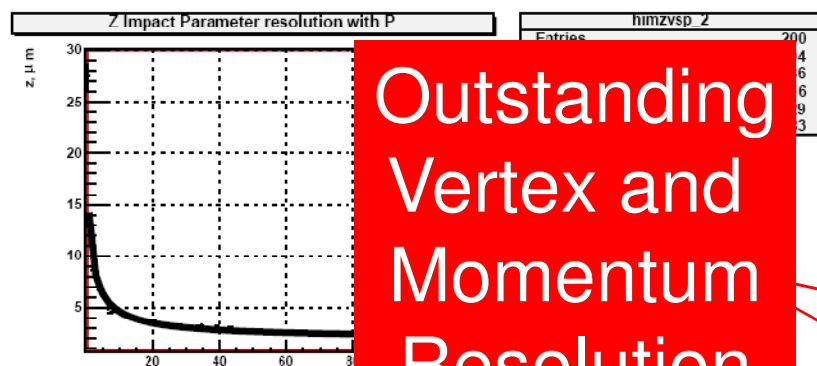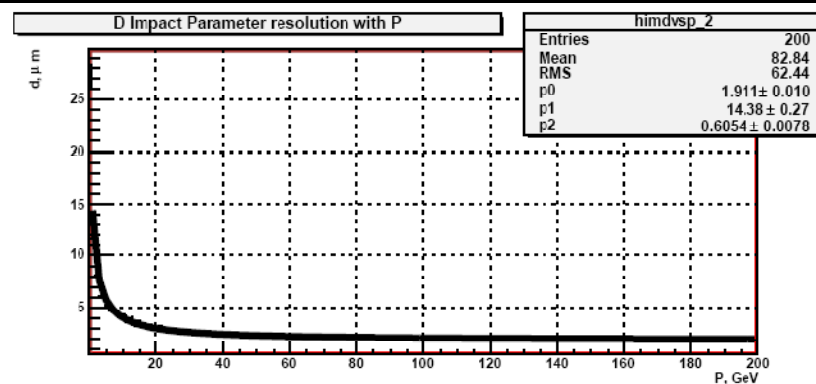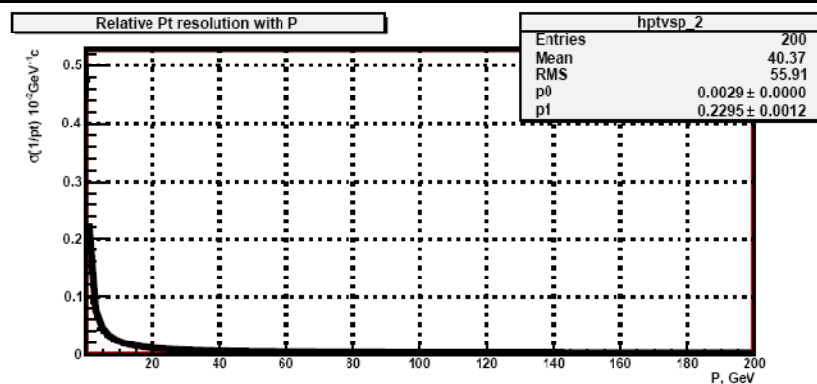

Outstanding
Vertex and
Momentum
Resolution

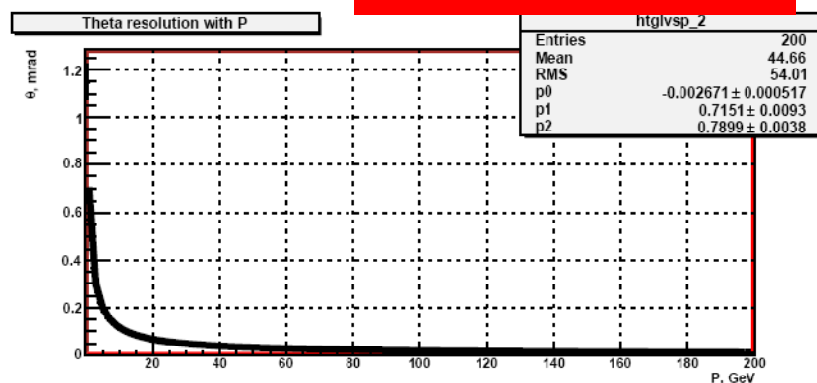

$$\sigma(P_t^{-1}) = 23 / P \oplus 0.29 \times 10^{-4} \text{ GeV}^{-1} c$$

$$\sigma(\vartheta) = 0.72 / P^{0.79} \oplus 0.002 \text{ mrad}$$





$$\sigma(\varphi) = 1.53 / P \oplus 0.027 \text{ mrad}$$

$$\sigma(D_o) = 14.4 / P^{0.61} \oplus 1.9 \mu\text{m}$$


$$\sigma(Z_o) = 14.2 / P^{0.53} \oplus 1.9 \mu\text{m}$$

Single muons
No beam bkg

Tracking resolution vs P

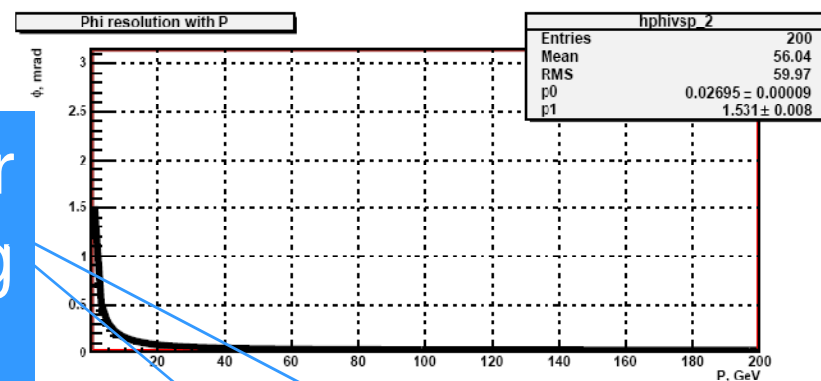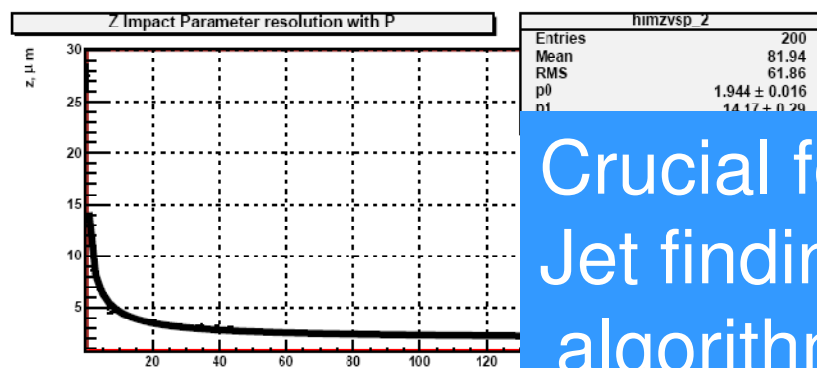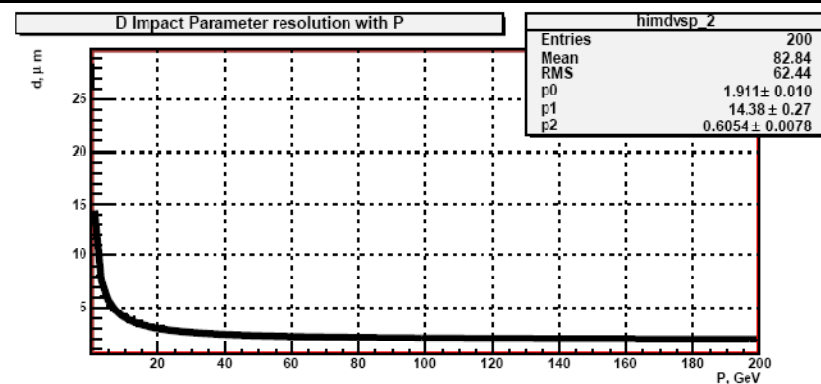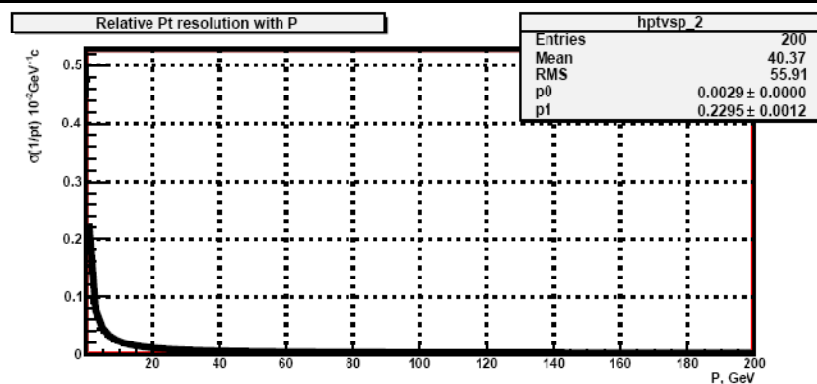

Crucial for
Jet finding
algorithm

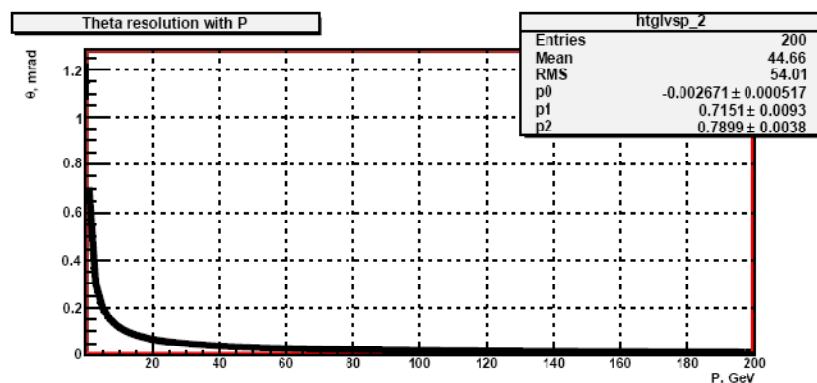

$$\sigma(P_t^{-1}) = 23 / P \oplus 0.29 \times 10^{-4} \text{ GeV}^{-1} c$$

$$\sigma(\vartheta) = 0.72 / P^{0.79} \oplus 0.002 \text{ mrad}$$

$$\sigma(\varphi) = 1.53 / P \oplus 0.027 \text{ mrad}$$

$$\sigma(D_o) = 14.4 / P^{0.61} \oplus 1.9 \mu\text{m}$$


$$\sigma(Z_o) = 14.2 / P^{0.53} \oplus 1.9 \mu\text{m}$$

Dual Readout Calorimetry for CLIC:

A conservative approach

- Main difference between ILC/ μ Collider is that at CLIC the neutron contribution may not be related to the shower being measured
- Because of intense γ - γ contamination, the time gate should be of the order of 20 nsec


Dual Readout in ILC/ μ Collider

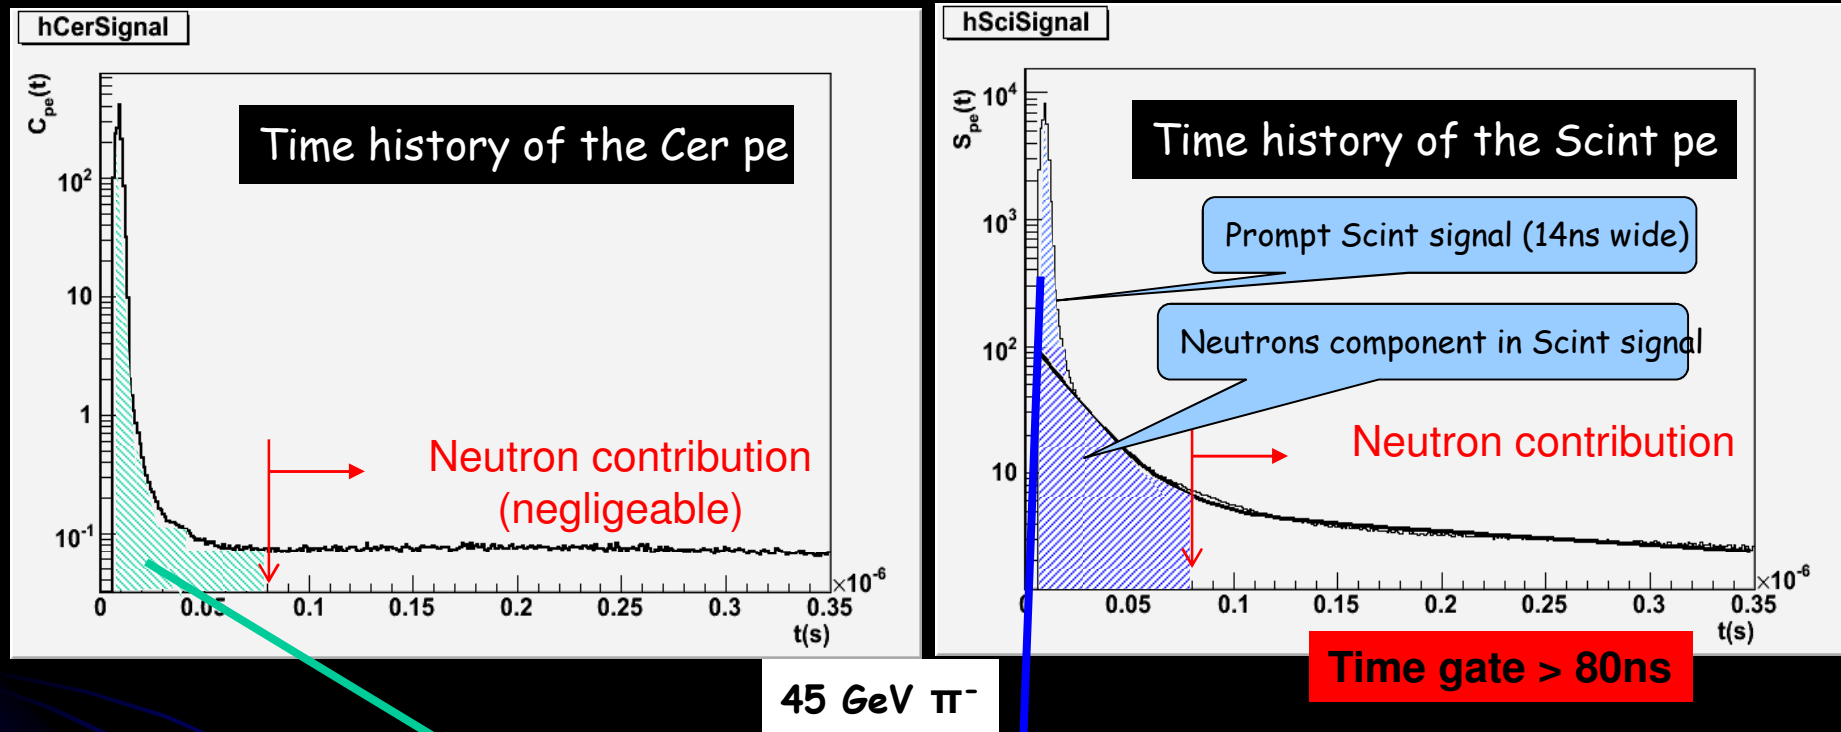

$$E_{HCAL} = \frac{\eta_C \cdot E_C \cdot (\eta_S - 1) - \eta_S \cdot E_S \cdot (\eta_C - 1)}{\eta_S - \eta_C}$$

In DualReadout the signals from Cerenkov and Scintillation fibers is integrated
Neutron contribution cannot be disentangled

Triple Readout in ILC/ μ Collider

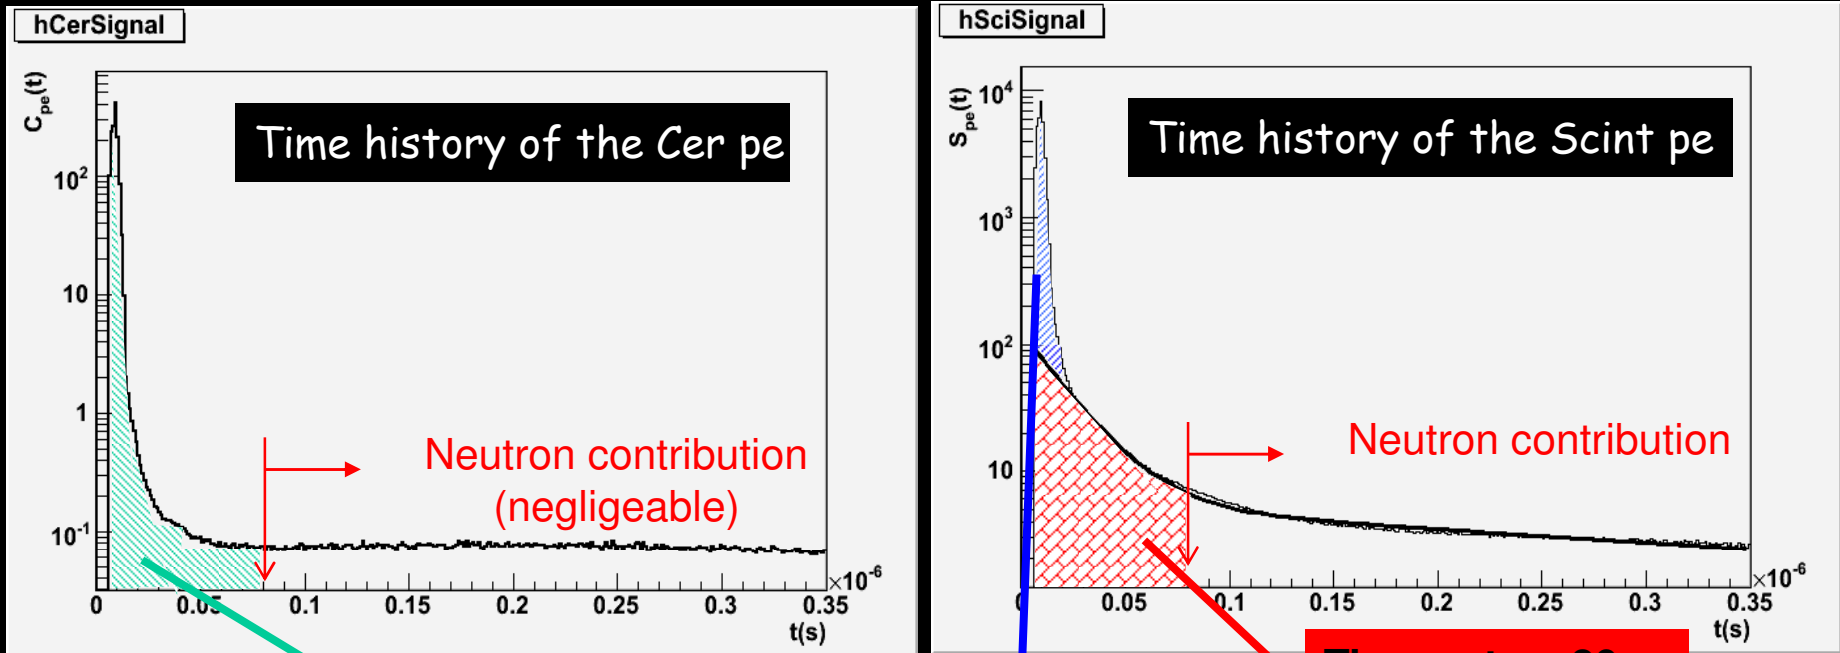


45 GeV π^-

$$E_{HCAL} = \frac{\eta'_C \cdot E_C \cdot (\eta'_S - 1) - \eta'_S \cdot E_S \cdot (\eta'_C - 1)}{\eta'_S - \eta'_C} + \eta_n \cdot E_{neutrons}$$

Triple readout add the contribution from the neutrons
 It is a Dual Readout with time history readout
 Neutron contribution is extracted from fit and used in the formula

Dual Readout at CLIC: worst case

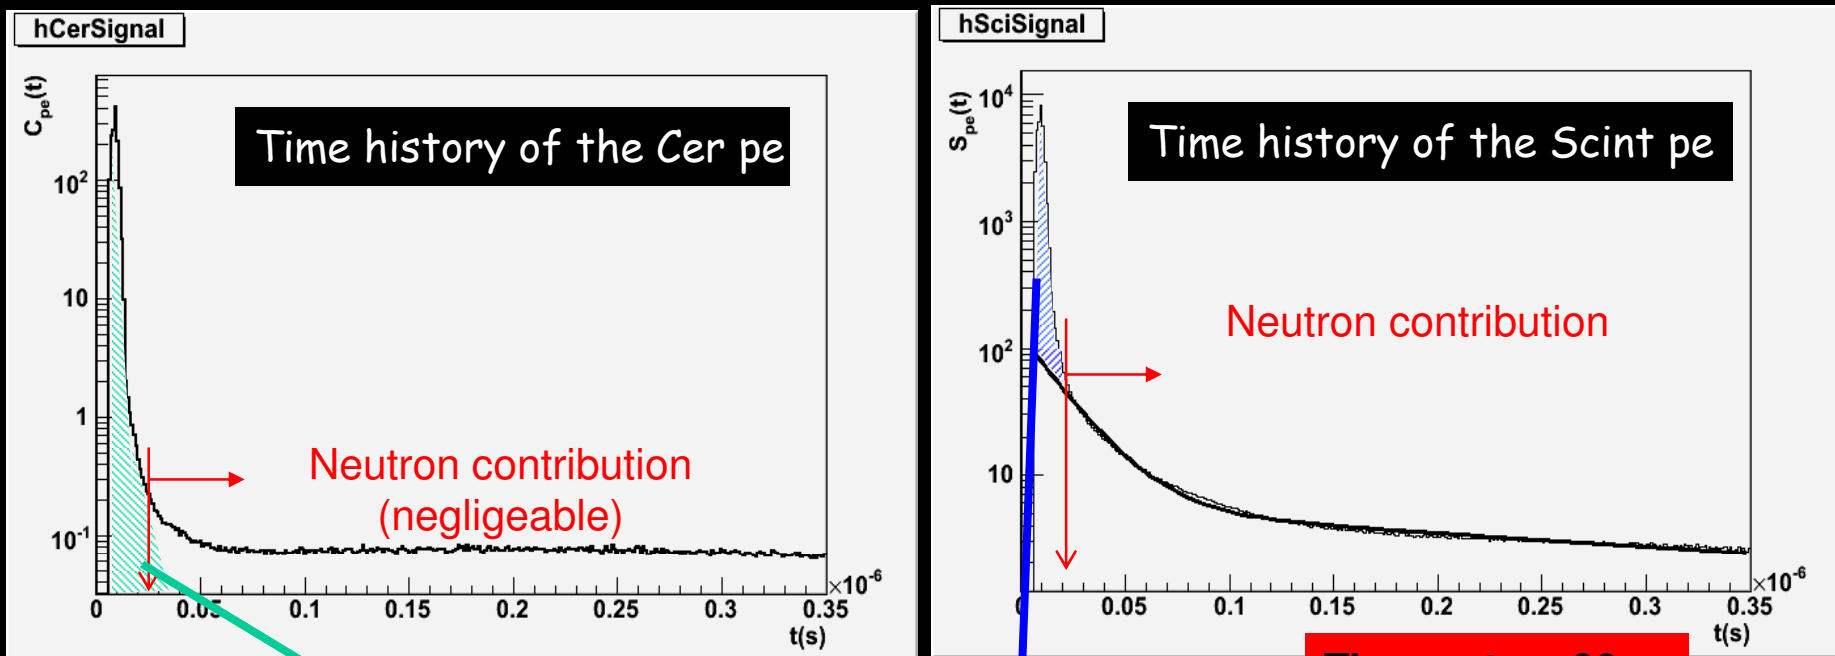


45 GeV π^-

$$E_{HCAL} = \frac{\eta''_c \cdot E_c \cdot (\eta''_s - 1) - \eta''_s \cdot E_s \cdot (\eta''_c - 1)}{\eta''_s - \eta''_c}$$


Neutron signal is disregarded
Scintillation contribution is extracted from fit and used in the formula

Performance (μ Collider vs CLIC)

Total Energy Resolution for π^- (Fiber + BGO)

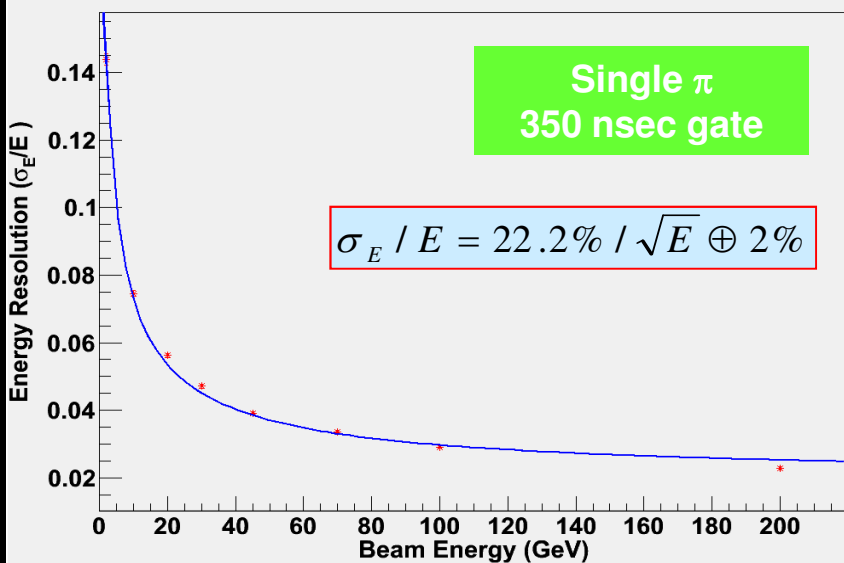


Erec π^- @ 45.0 GeV

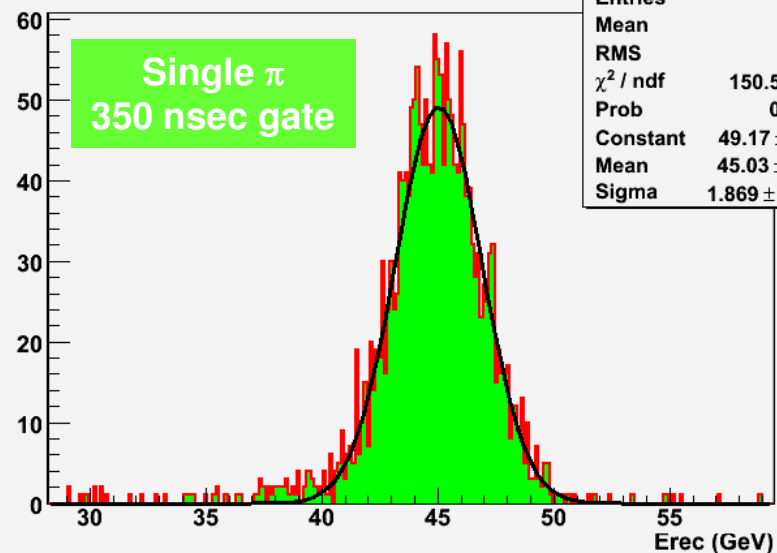


hEnergy	
Entries	1999
Mean	44.79
RMS	2.569
χ^2 / ndf	150.5 / 132
Prob	0.1288
Constant	49.17 ± 1.49
Mean	45.03 ± 0.04
Sigma	1.869 ± 0.037

Total Energy Resolution for π^- (Fiber + BGO)




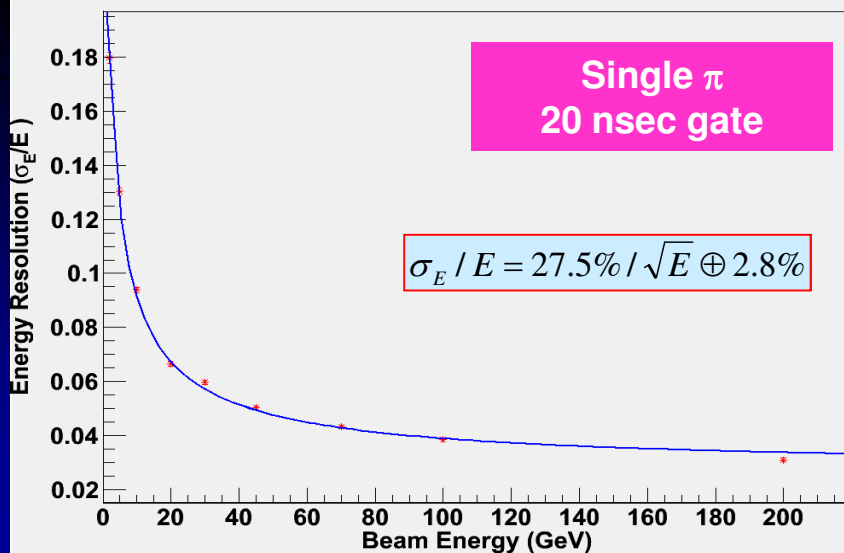


Erec π^- @ 45.0 GeV

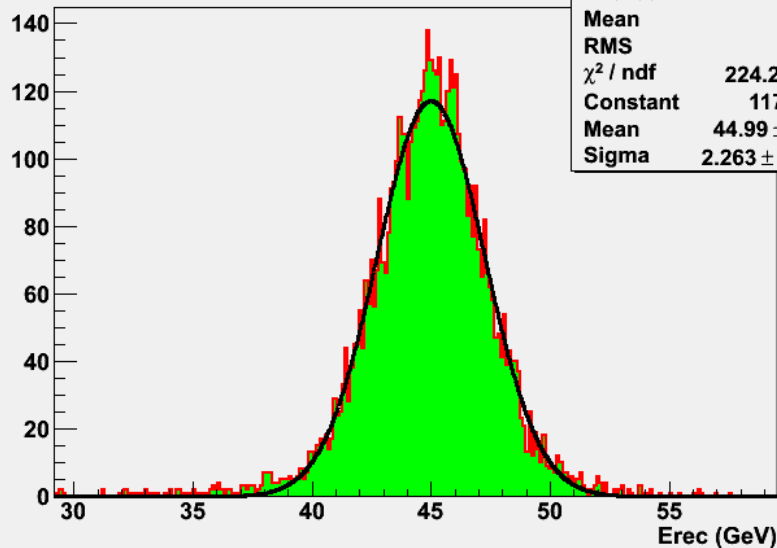


hEnergy	
Entries	5859
Mean	44.92
RMS	2.643
χ^2 / ndf	224.2 / 183
Constant	117 ± 2.1
Mean	44.99 ± 0.03
Sigma	2.263 ± 0.026

Performance (μ Collider vs CLIC)

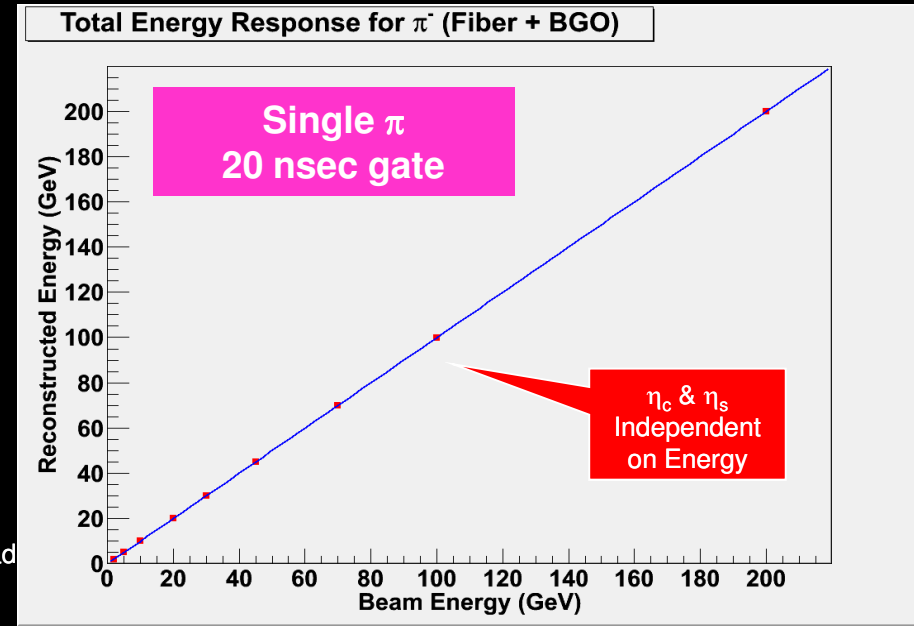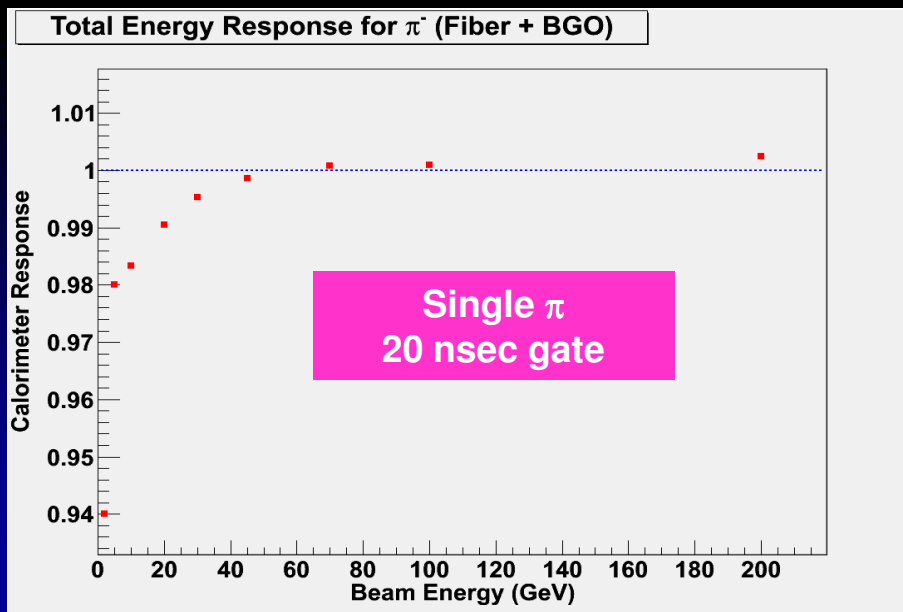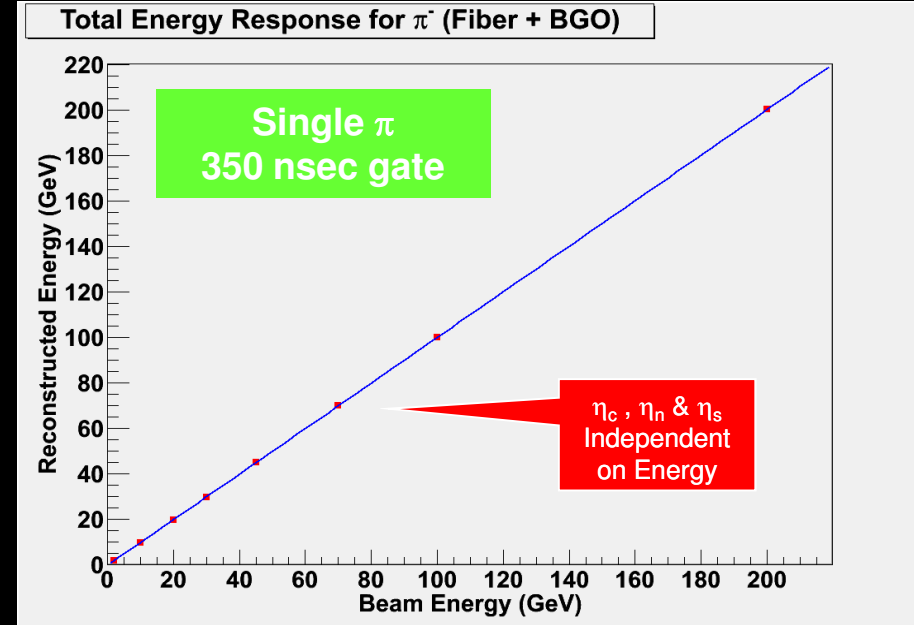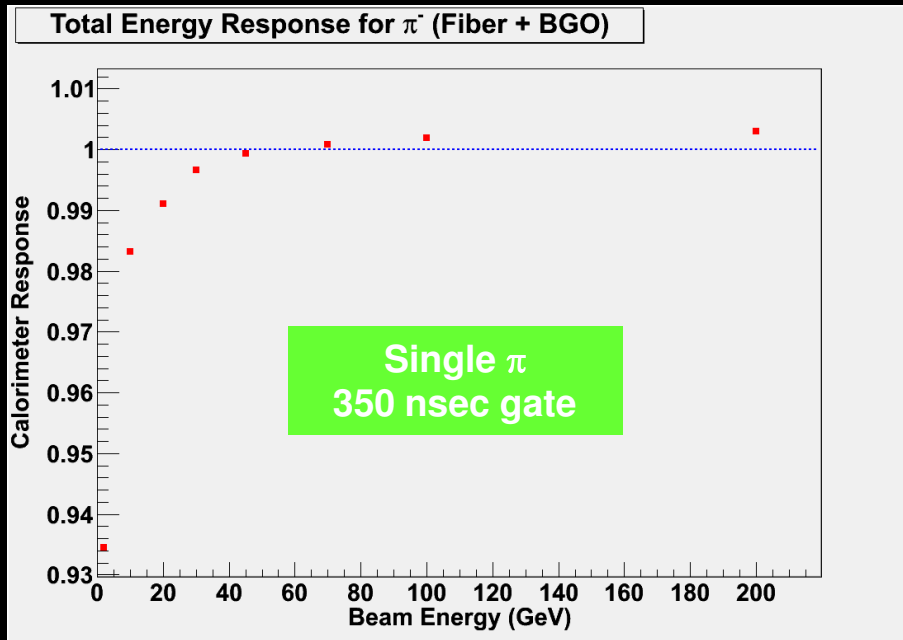


Muon Spectrometer Performance

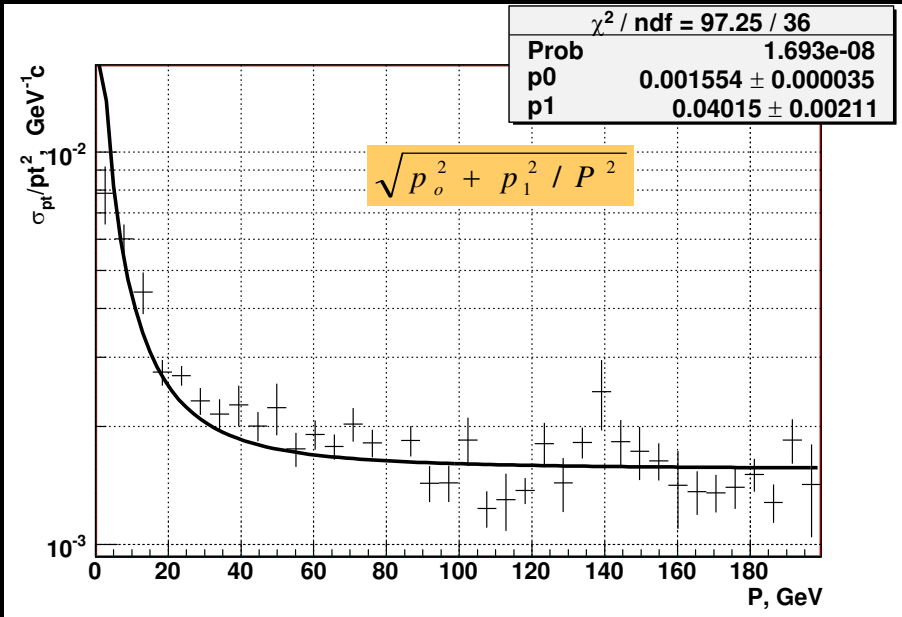

ILCRoot simulation


$$\sigma (P_t^{-1}) = 0.04 / P \oplus 1.5 \times 10^{-3} \text{ GeV}^{-1} c$$

vs 10% for a range based detector

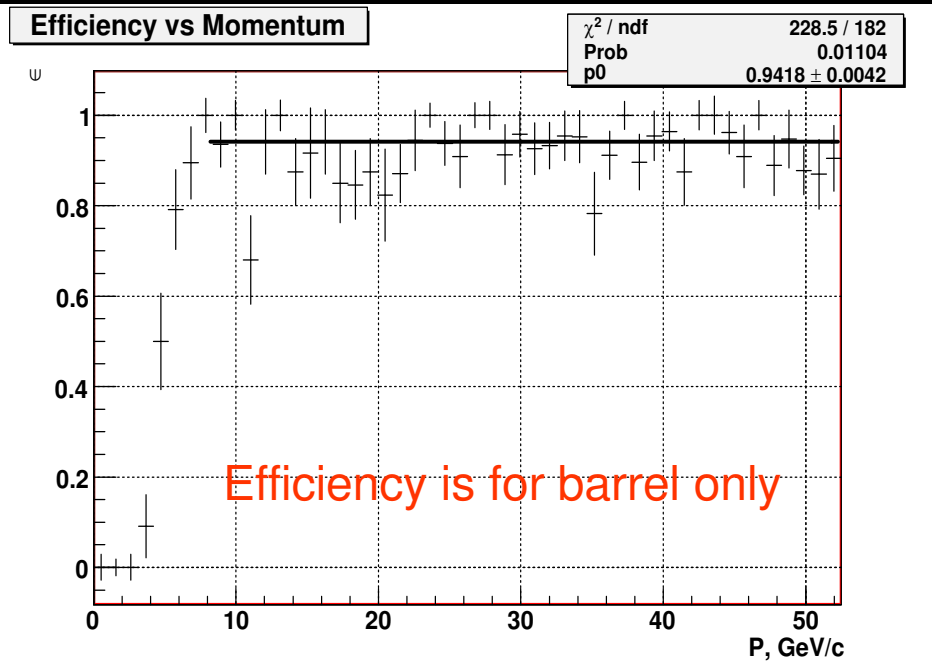

W/Z separation


Jet Reconstruction Strategy: combine

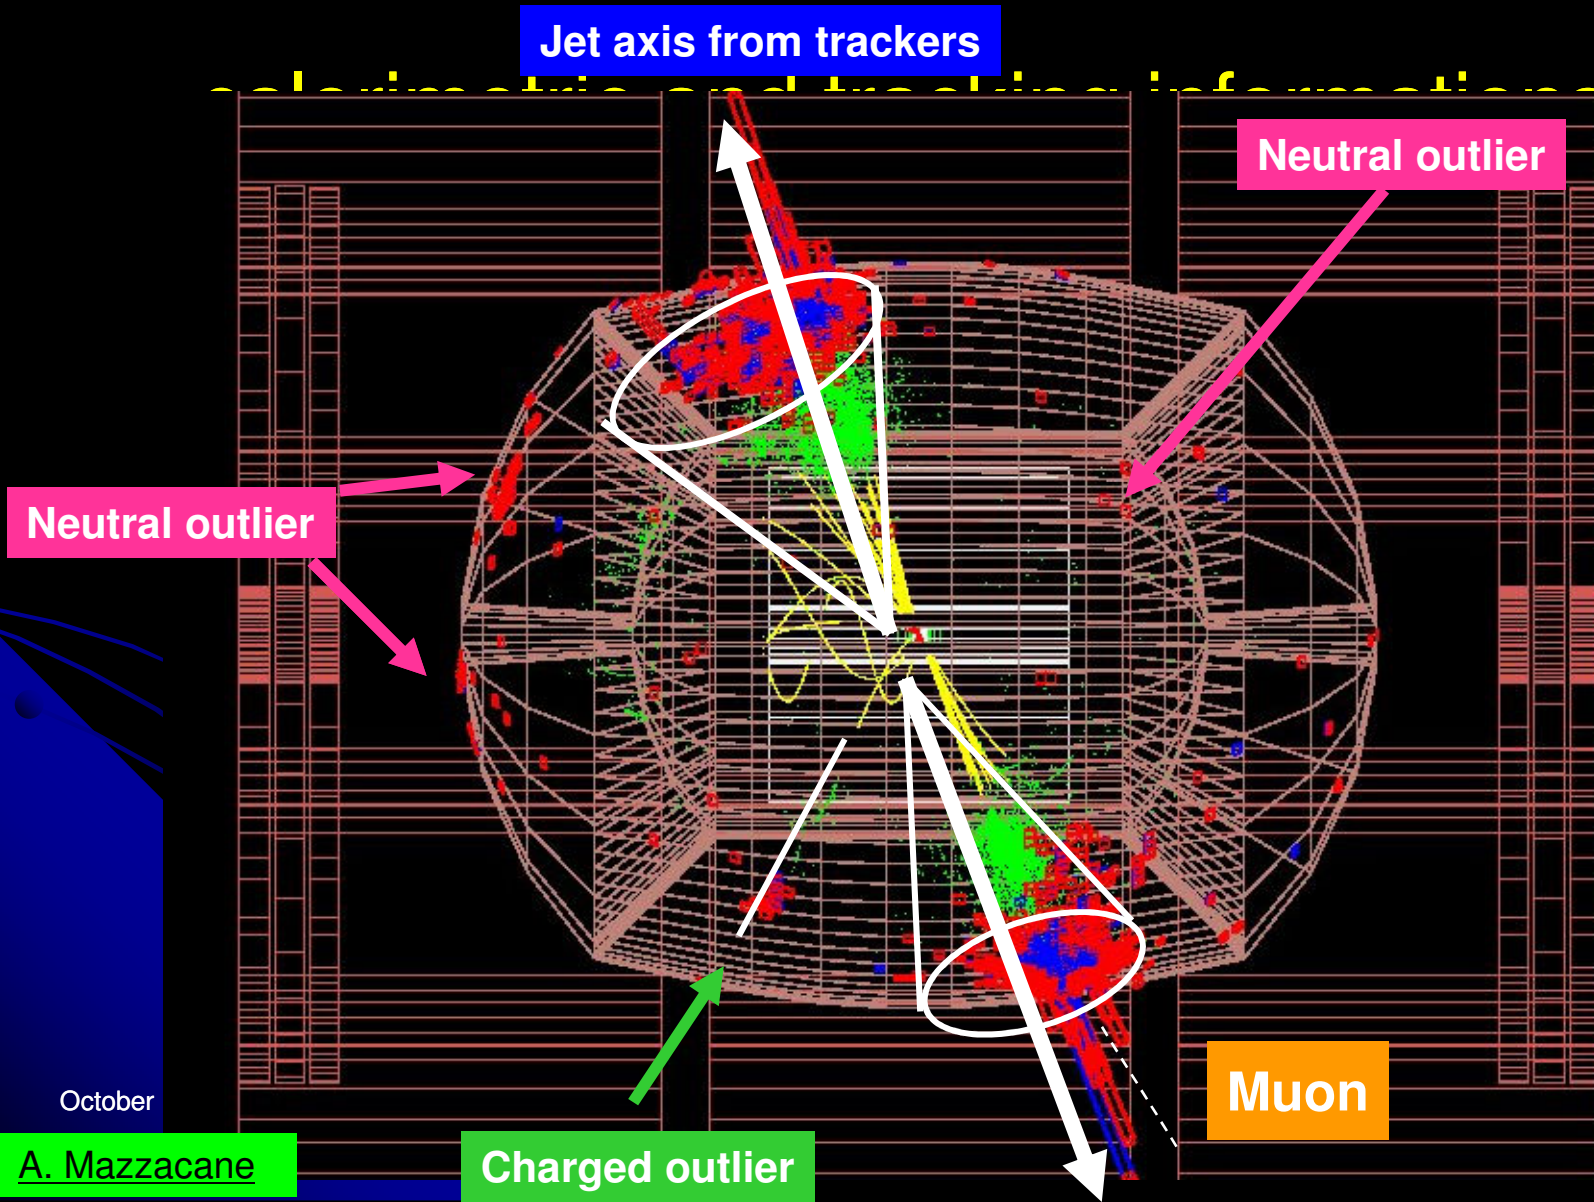

October

A. Mazzacane

W/Z Mass Separation at 500 GeV with Triple Readout

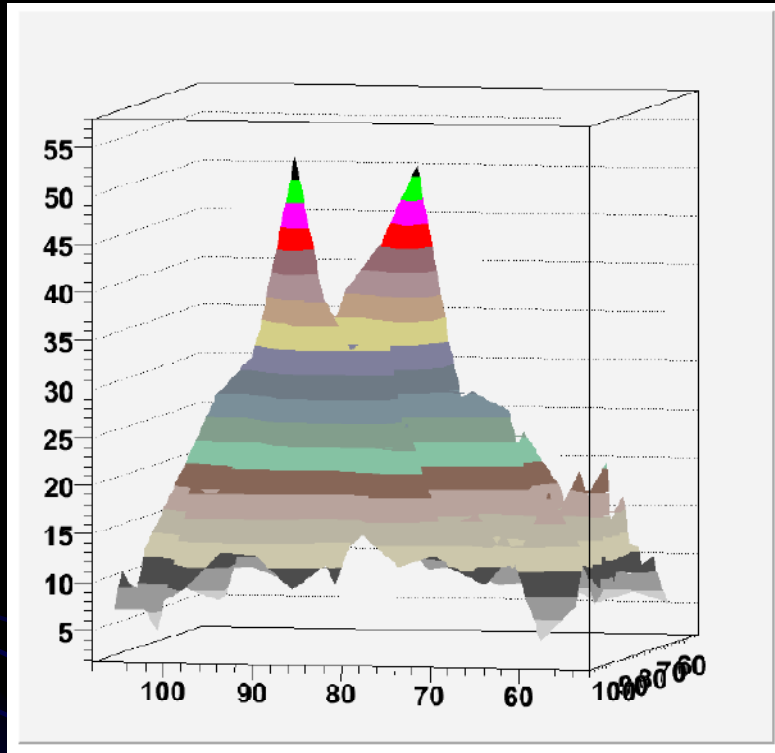


All combination plotted

(3 entries/event)

$$e^+e^- \rightarrow W^+W^- \nu\bar{\nu}, Z^0Z^0 \nu\bar{\nu}$$

- No fully combined information with tracking yet
- No ECAL
- 4-jets finding efficiency: 95%

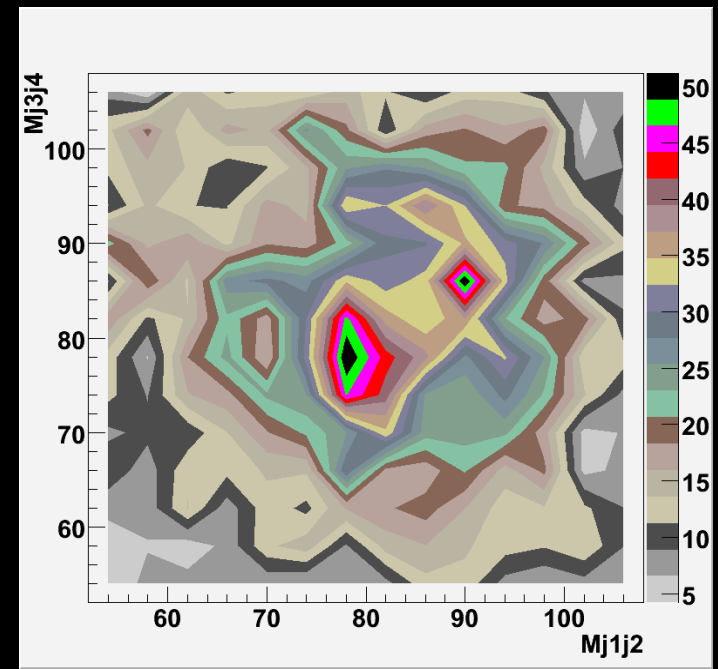


October 15th, 2009

CLIC09 - Corrado Gatto

A. Mazzacane

W/Z Mass Separation at 3 TeV with Dual Readout

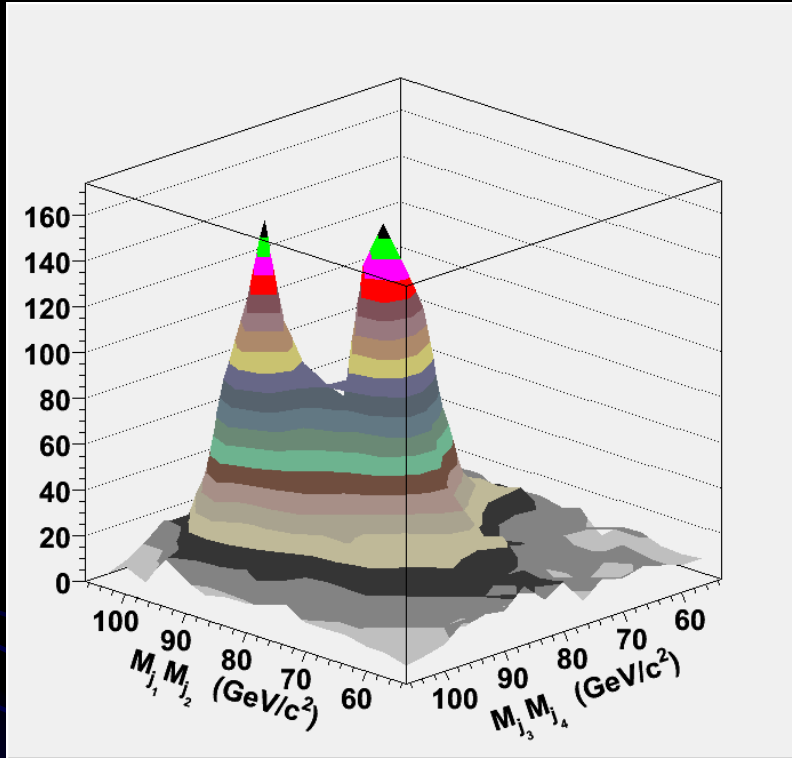


All combination plotted

(3 entries/event)

$$e^+e^- \rightarrow W^+W^- \nu\bar{\nu}, Z^0Z^0 \nu\bar{\nu}$$

- No fully combined information with tracking yet
- ECAL included

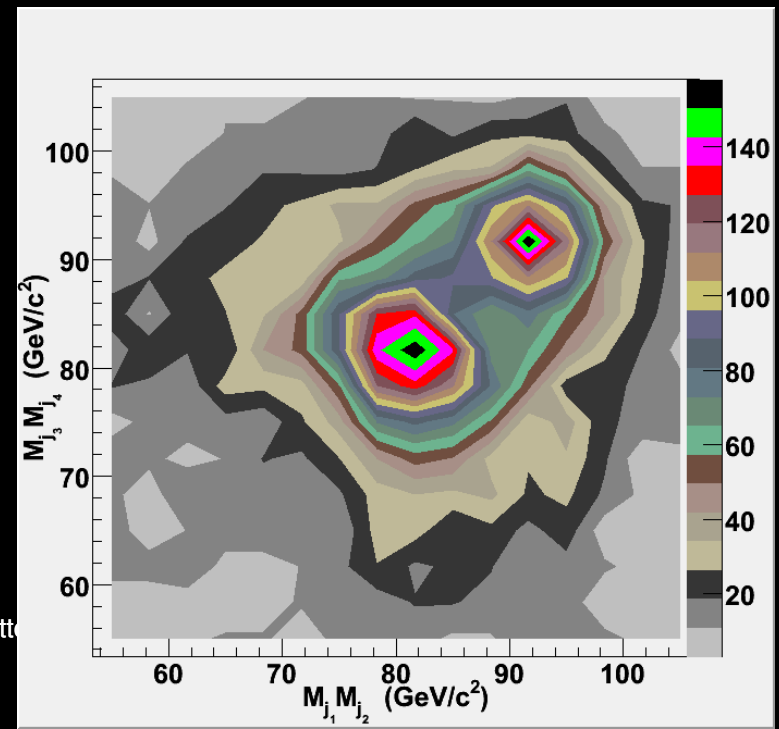


October 15th, 2009

CLIC09 - Corrado Gatt

A. Mazzacane

W/Z Mass Separation at 3 TeV with Dual Readout

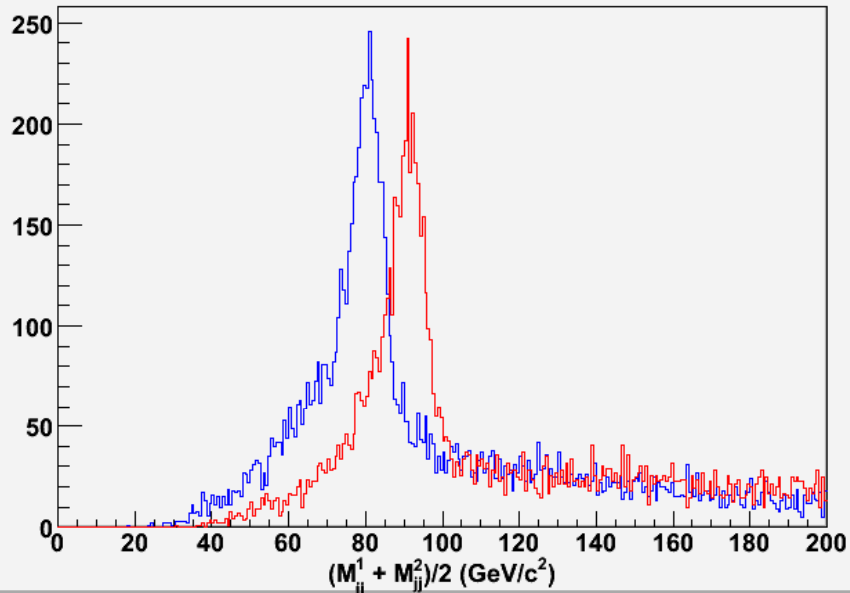

$$e^+e^- \rightarrow W^+W^- \nu \bar{\nu}, Z^0 Z^0 \nu \bar{\nu}$$

- No fully combined information with tracking yet
- ECAL included


All combination plotted

(3 entries/event)

October 15th, 2009

CLIC09 - Co

A. Mazzacane

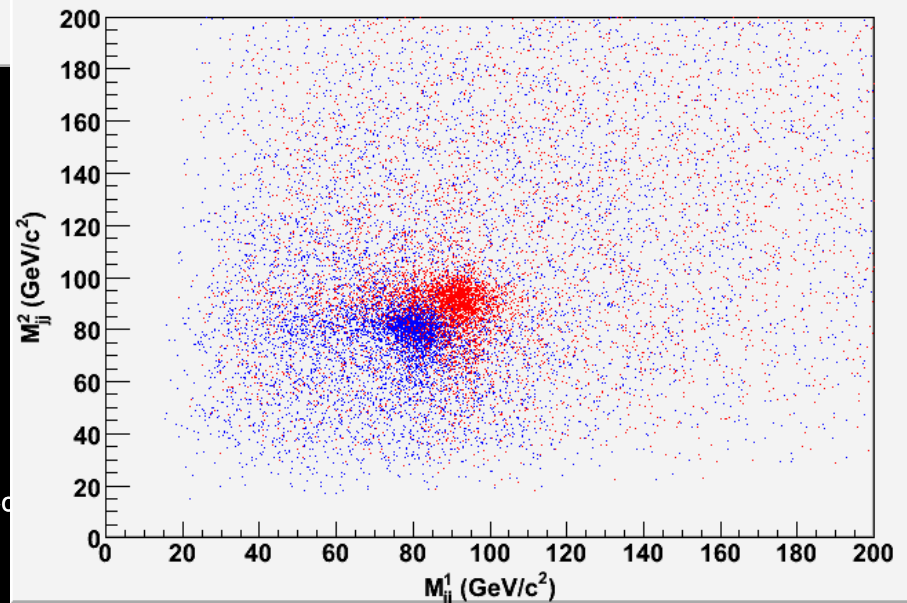


Event Display

$$e^+e^- \rightarrow W^+W^- \nu\bar{\nu}, Z^0Z^0\nu\bar{\nu}$$
$$E_{CM} = 3\text{TeV}$$

Reconstructed
charged tracks

muons

Energy deposit
in calorimeters

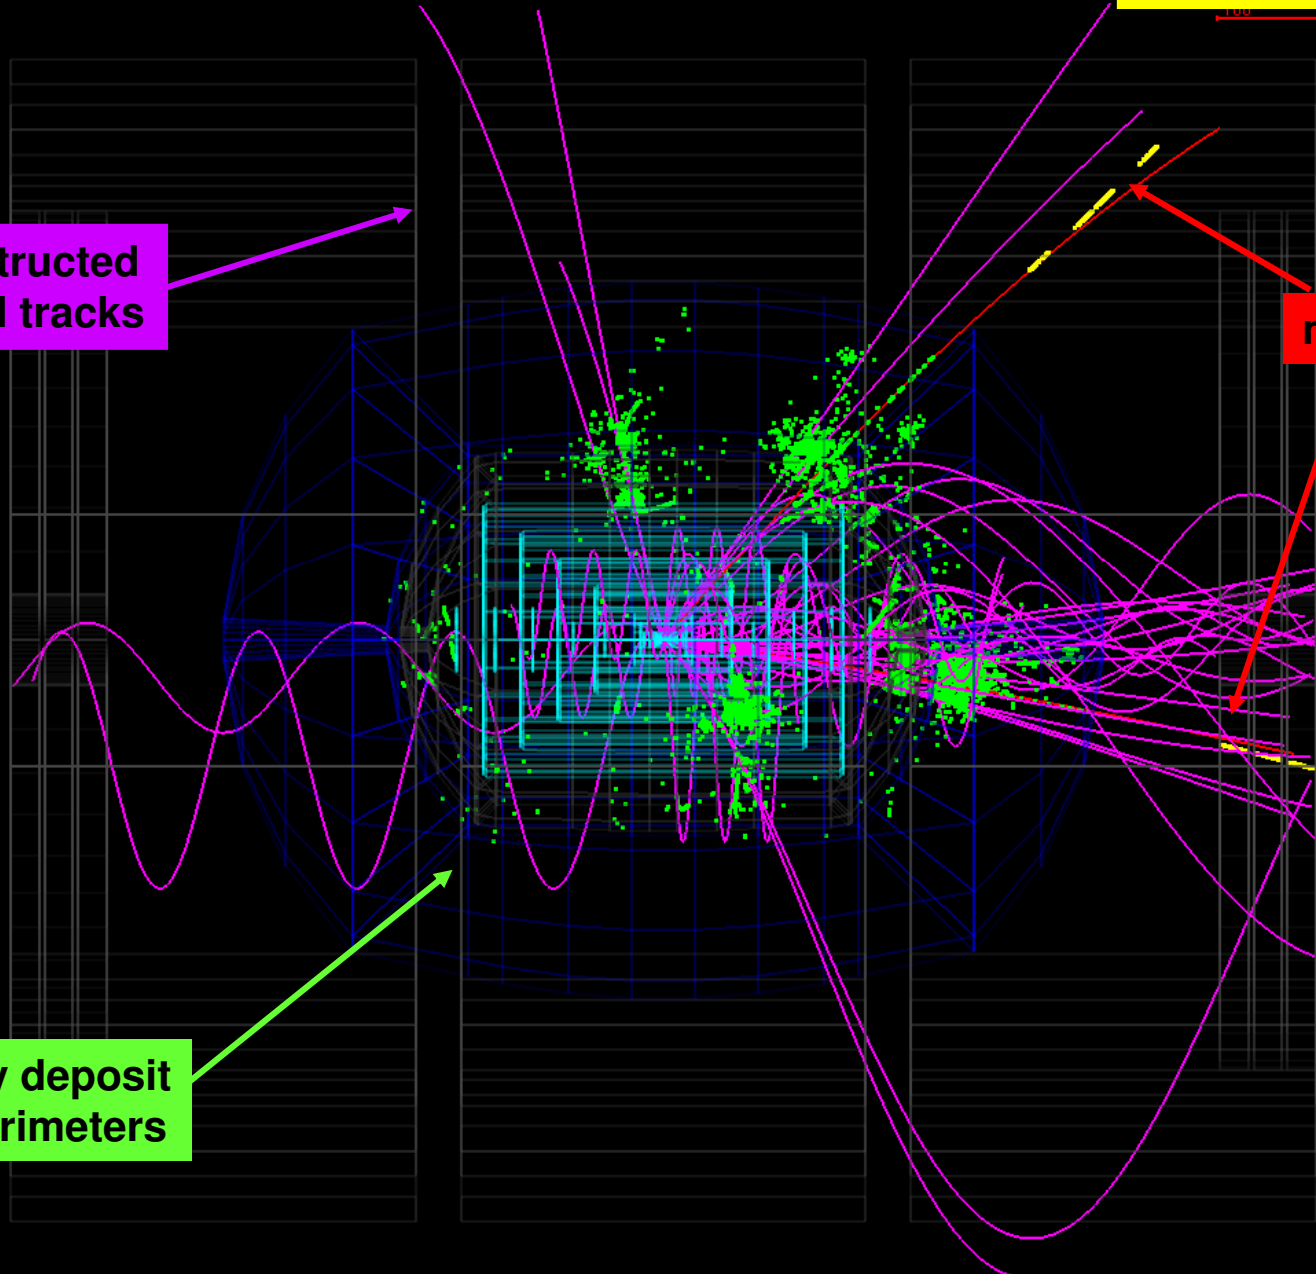

$$e^+e^- \rightarrow \chi_1^+\chi_1^- \rightarrow \chi_1^0\chi_1^0 W^+W^-$$

$$\sqrt{s}=500 \text{ GeV}$$

$$e^+e^- \rightarrow \chi_2^0\chi_2^0 \rightarrow \chi_1^0\chi_1^0 Z^0Z^0$$

Event reconstruction :

List charged traks from trackers

List of HCAL towers and ECAL cells with $E > 10 \text{ MeV}$
after calorimeters calibration

Jet pairing :

$$\min |m_{ij} - m_{kl}|$$

To further reduce background:

$$|m_{ij} - m_{kl}| < 5 \text{ GeV}/c^2$$

WW/ZZ selection :

Fit on dijet-mass invariant distribution

Event selection :

Events forced into 4jets (Durham)

$$E_{\text{jet}} \geq 5 \text{ GeV}$$

$$|\cos \theta_{\text{jet}}| < 0.99$$

$$N_{\text{total l charged tracks in jet}} \geq 2$$

$$N_{\text{total charged tracks}} \geq 20$$

$$Y_{\text{cut}} > 0.001$$

$$100 \text{ GeV} < E_{\text{vis}} < 250 \text{ GeV}$$

$$|\cos \theta_{\text{miss P}}| < 0.8$$

$$M_{\text{miss}} > 220 \text{ GeV}/c^2$$


No lepton with $E_{\text{lepton}} > 25 \text{ GeV}$

$$\varepsilon_{\text{chargino}} = 30.3\%$$

$$\varepsilon_{\text{neutralino}} = 28.6\%$$

$$e^+e^- \rightarrow \chi_1^+\chi_1^- \rightarrow \chi_1^0\chi_1^0 W^+W^- \quad \sqrt{s}=500 \text{ GeV}$$

$$e^+e^- \rightarrow \chi_2^0\chi_2^0 \rightarrow \chi_1^0\chi_1^0 Z^0Z^0$$

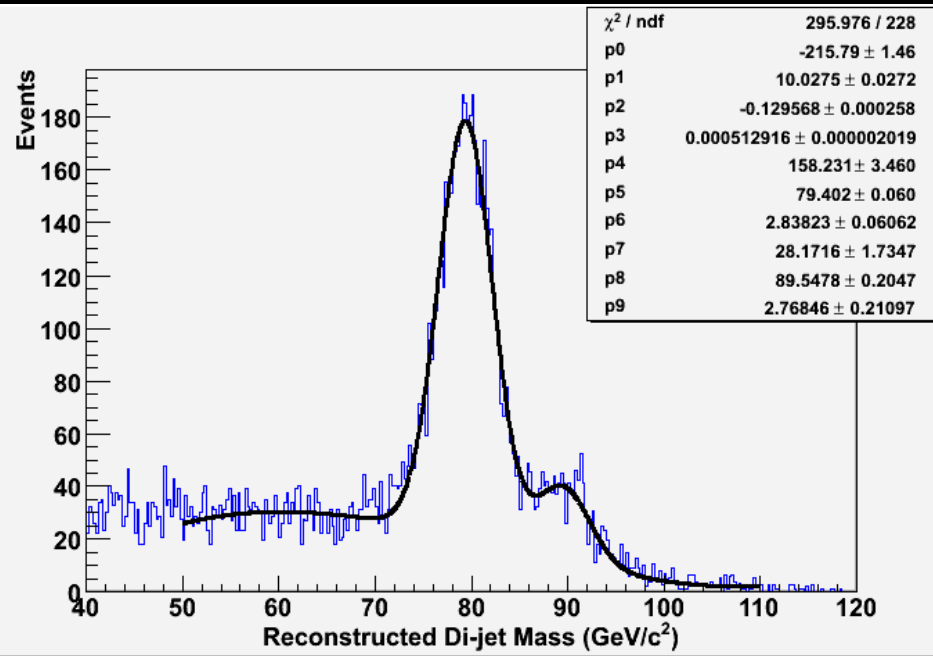

Fitted distribution (double gaussian plus 3rd order polynomial)


$$M_W = 79.40 \pm 0.06 \text{ GeV}/c^2$$

$$\sigma_W = 2.84 \pm 0.06 \text{ GeV}/c^2$$

$$M_Z = 89.55 \pm 0.20 \text{ GeV}/c^2$$

$$\sigma_Z = 2.77 \pm 0.21 \text{ GeV}/c^2$$

Reconstructed masses after selection cuts and jet pairing

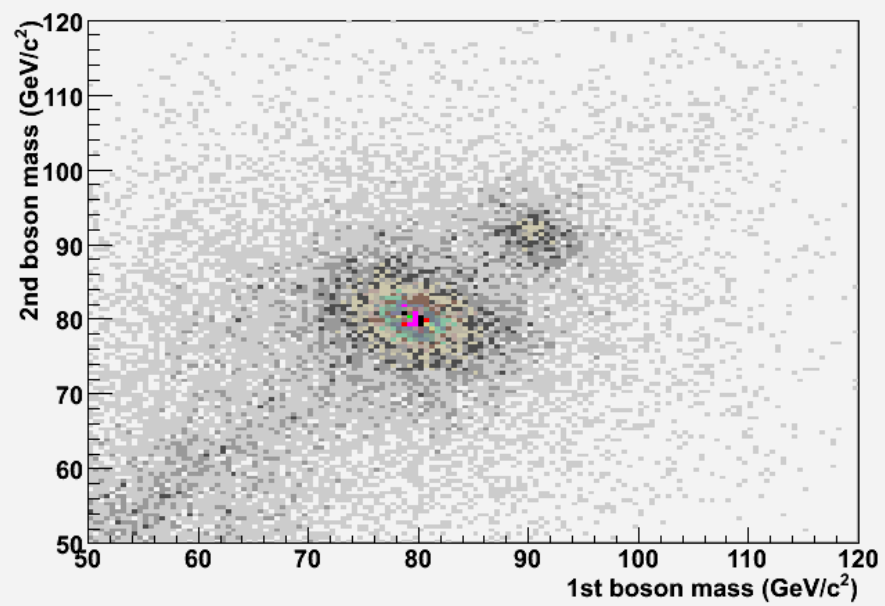

October 15th, 2009

CLIC09 - Co

A. Mazzacane


Conclusions

- An alternative detector layout is presented by the 4th Concept Collaboration for Physics at Multi TeV Lepton Collider
 - Si pixel detector + Forward Tracker replace Drift Chamber
 - Time gate of Dual Readout calorimeter reduced to 20ns
- **Eventual collaboration with SiLC will strengthen the project**
- **Simulation machinery (ILCroot) already in place**
- It has run flawlessly along the benchmark process for LOI at ILC (200-1000 CPU on Fermi-GRID almost no-stop since August 2008)
- **Overall detector performance is excellent**
- Physics studies at Multi TeV E_{CM} are in progress: must include bckgnd
- **W and Z separation is preserved at 3 TeV with short DR time gate**

Backup slides

VXD Single Cluster Residual (single track)

- FNAL/SLAC layout more than adequate for current requirements at ILC
- Main Issue is choice of technology
- Mostly driven by Montecarlo studies on beam background

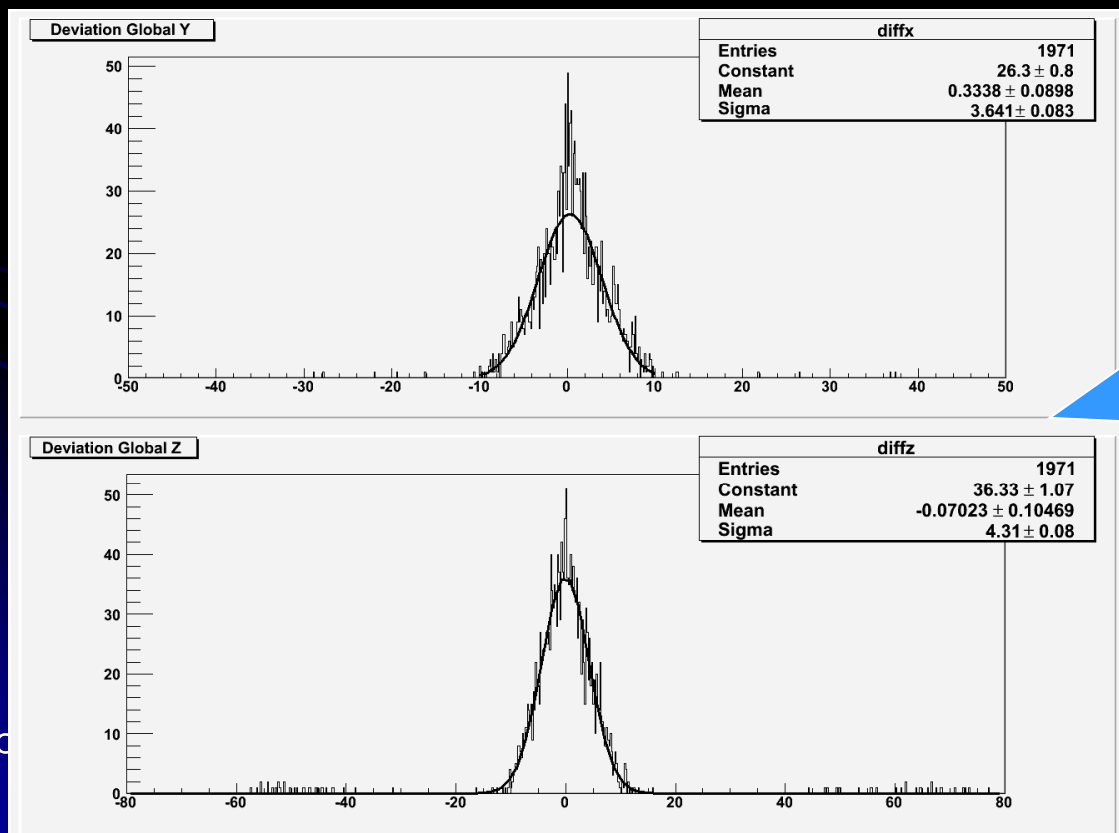

Includes:

1. Diffusion in Si
2. Cross talk
3. Gaussian noise
4. Electronic thresholds
5. Clusterization

The Virtual Montecarlo Concept

- Virtual MC provides a virtual interface to Monte Carlo
- It allows to run the same user application with all supported Monte Carlo programs
- The concrete Monte Carlo (Geant3, Geant4, Fluka) is selected and loaded at run time
 - Compare Montecarlo performance and possible flows
 - Choose the optimal Montecarlo for the study








October 15th, 2009

Perfect Tool for Designing/Optimizing new Detectors

4th Concept Software Strategy: ILCroot

- **CERN** architecture (based on *Alice's Aliroot*)
- Full support provided by Brun, Carminati, Ferrari, et al.
- Uses **ROOT** as infrastructure
 - All ROOT tools are available (I/O, graphics, PROOF, data structure, etc)
 - Extremely large community of users/developers
- TGenerator for events generation
- Virtual Geometry Modeler (VGM) for geometry
- Based on **Virtual Montecarlo**
- Could it ever evolve into a general purpose entity for the HEP community (as ROOT)?
- Growing number of experiments have adopted it: Alice, Opera, CMB, (Meg), Panda, 4th Concept
- **Six MDC have proven robustness, reliability and portability**




VXD + SiPT + FTD

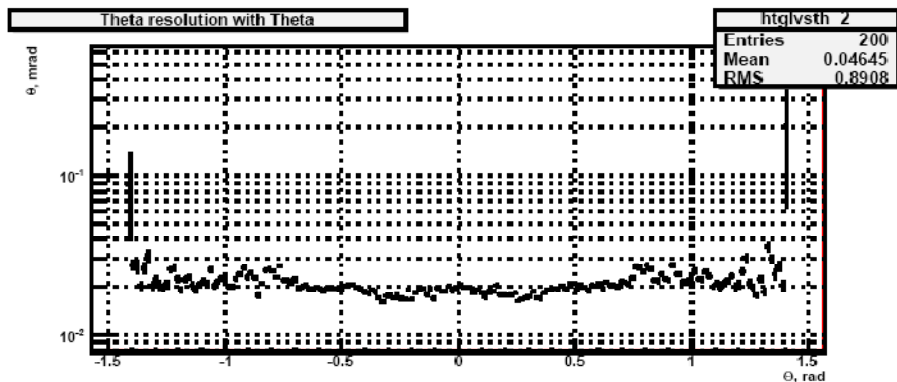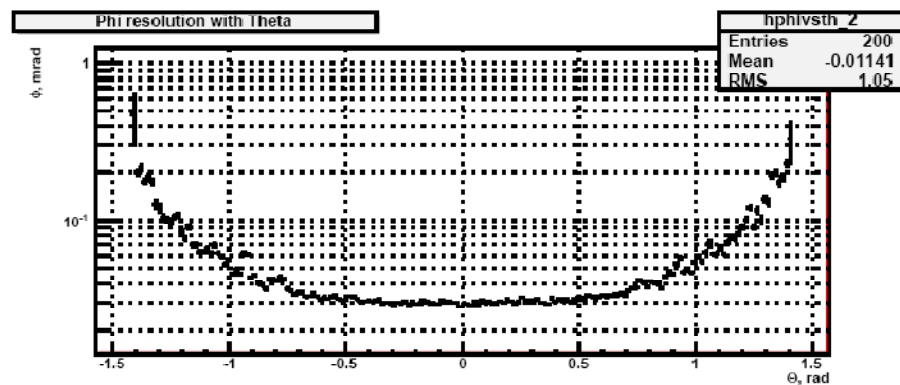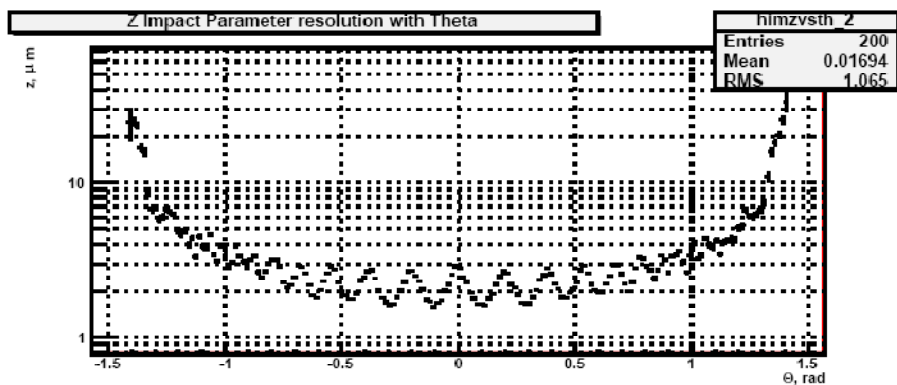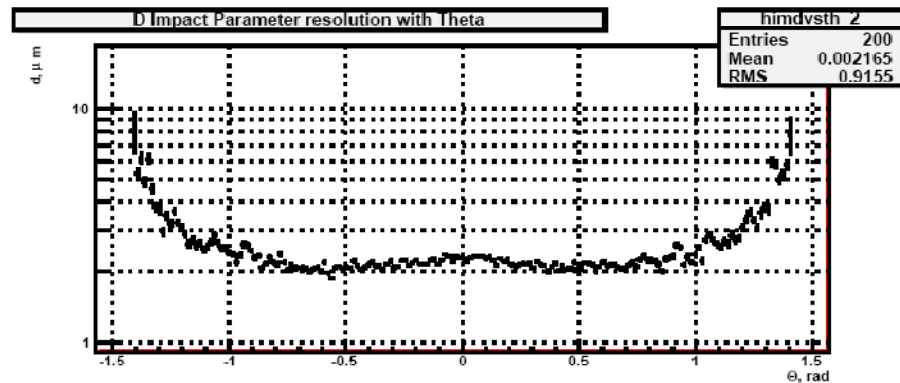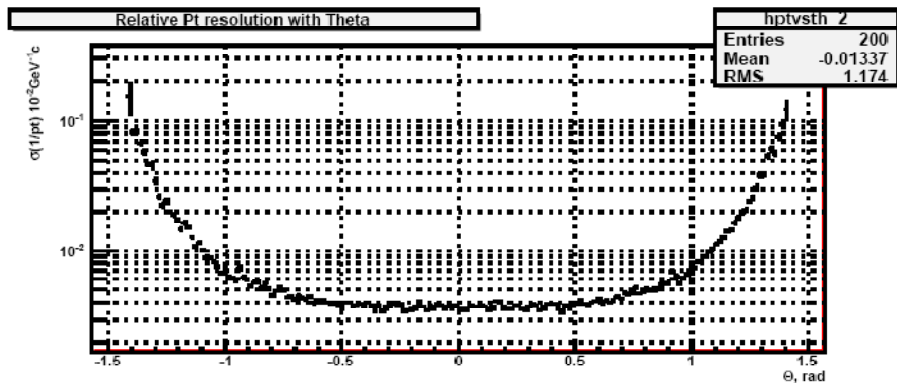

Dual Readout Calorimetry

Total calorimeter energy: use two measured signals and two, energy-independent, calibration constants

$$E_{HCAL} = \frac{\eta_s \cdot E_s \cdot (\eta_c - 1) - \eta_c \cdot E_c \cdot (\eta_s - 1)}{\eta_c - \eta_s}$$

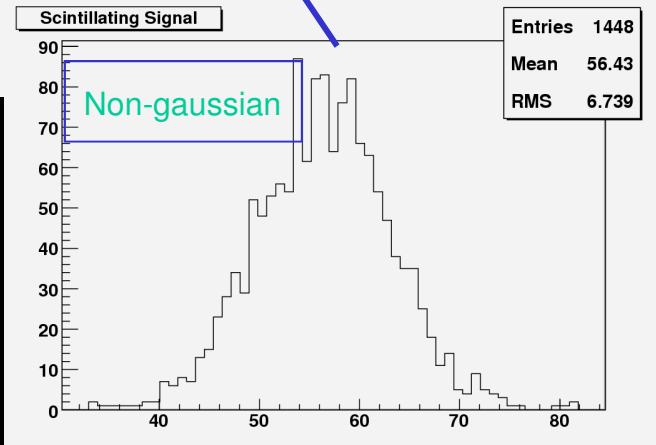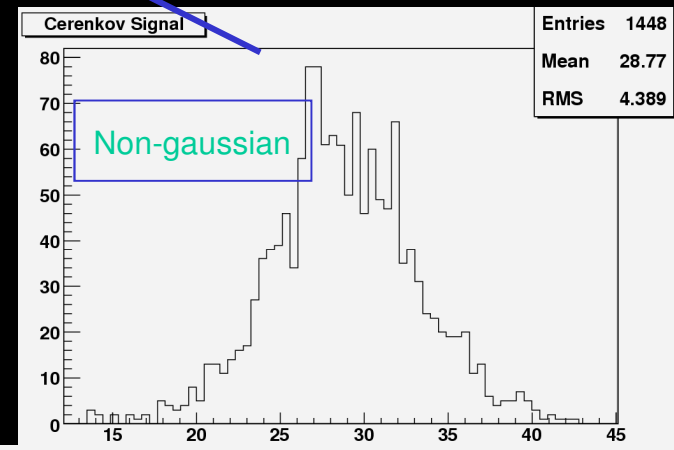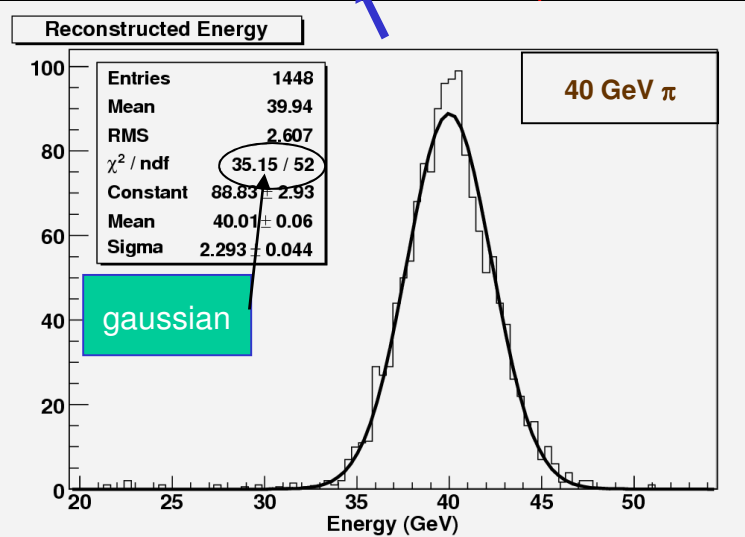


$$\eta_c = \left(\frac{e}{h}\right)_c \quad \eta_s = \left(\frac{e}{h}\right)_s$$

From calibration
@ 1 Energy only



October 15th, 2009

Improving the Energy Resolution: The Effect of Neutrons

45 GeV π^-

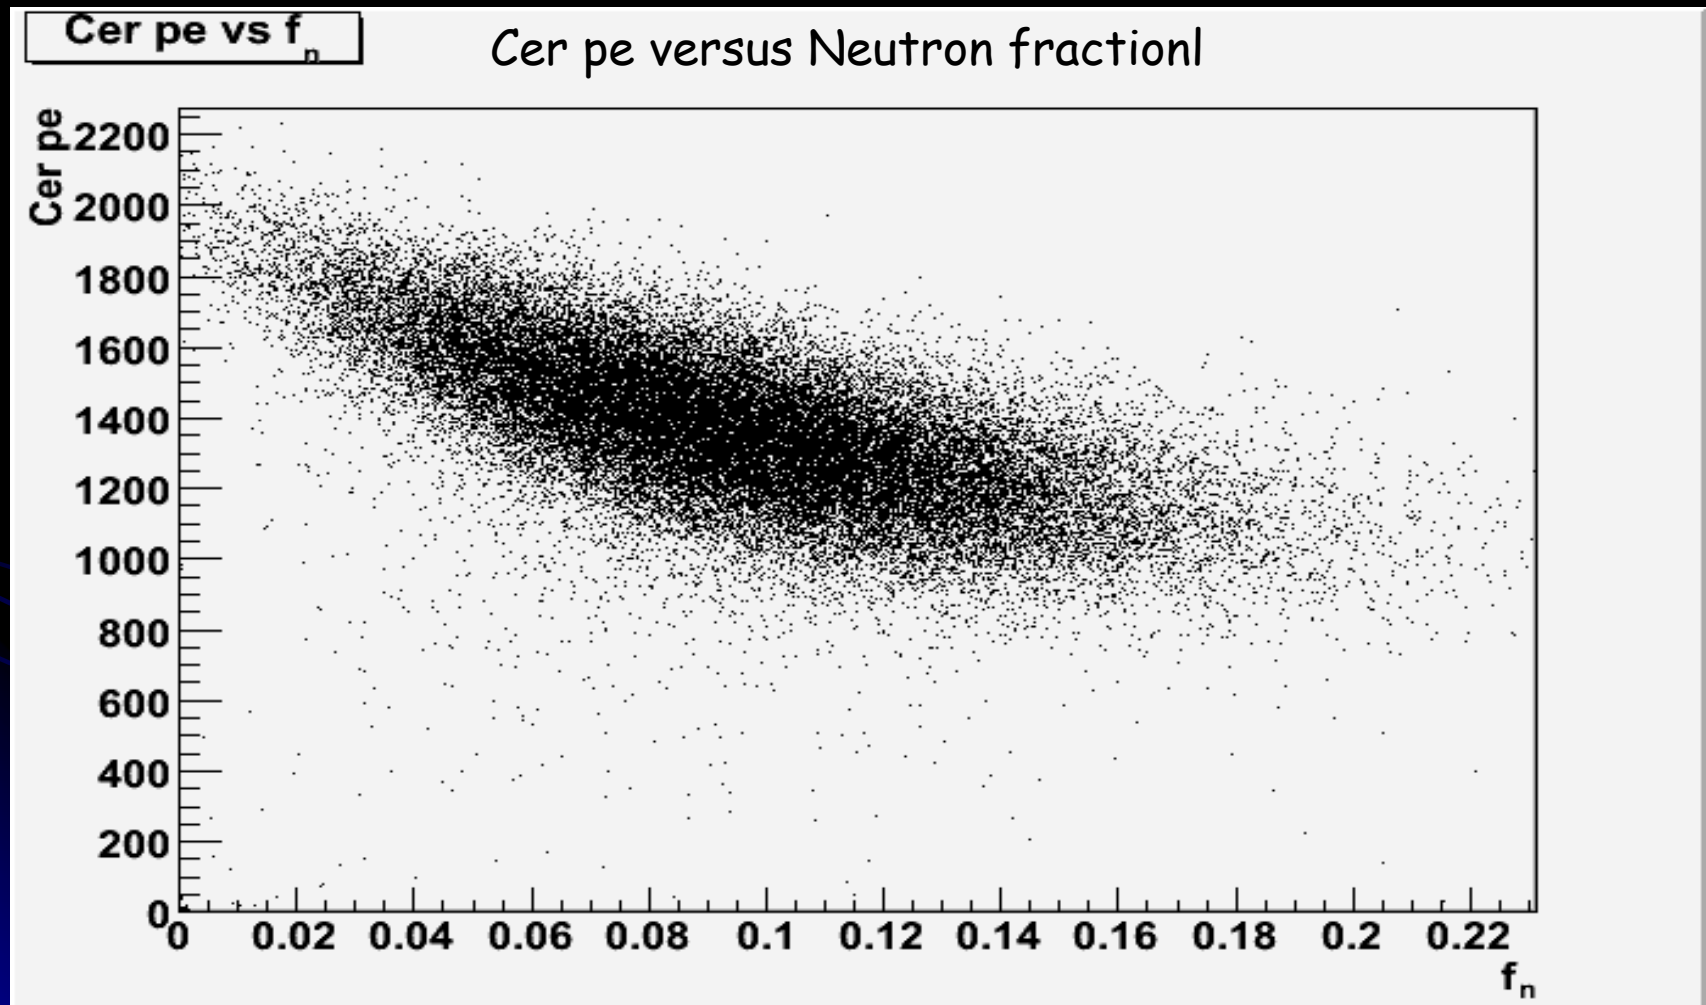

From Dual to Triple Readout

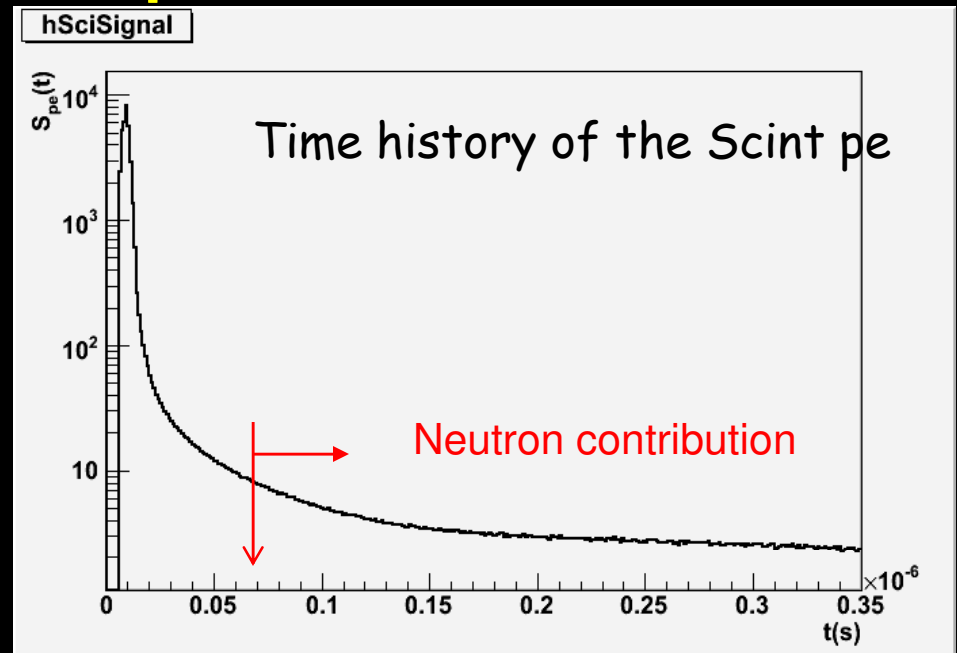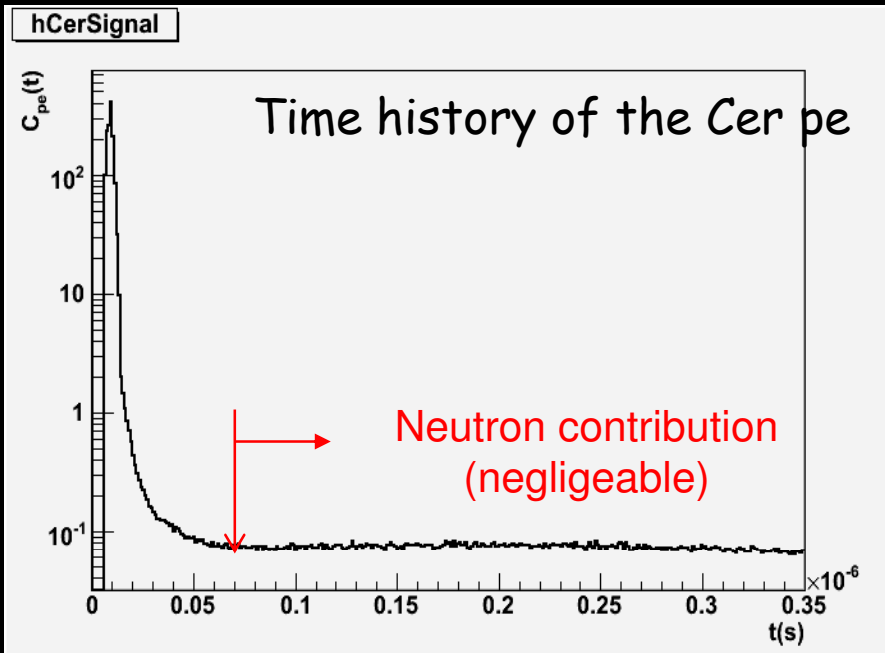

45 GeV π^-

$$E_{HCAL} = \frac{\eta_s \cdot E_s \cdot (\eta_c - 1) - \eta_c \cdot E_c \cdot (\eta_s - 1)}{\eta_c - \eta_s} + \eta_n \cdot E_{neutrons}$$

Triple readout aka Dual Readout with time history readout

Compensation with ECAL and HCAL

- Get E_{Scint} and E_{Cer} from ECAL (disregard neutrons as $Z_{\text{BGO}} \gg 1$)
- Get E_{Scint} , E_{Cer} and E_{neutr} from HCAL
- Then:



$$E_{\text{Total}} = \frac{\eta_S \cdot (E_{\text{Scint}}^{\text{ECAL}} + E_{\text{Scint}}^{\text{HCAL}}) \cdot (\eta_C - 1) - \eta_C \cdot (E_{\text{Cer}}^{\text{ECAL}} + E_{\text{Cer}}^{\text{HCAL}}) \cdot (\eta_S - 1)}{\eta_C - \eta_S} + \eta_n \cdot E_{\text{neutrons}}^{\text{HCAL}}$$

- Estimate η_C , η_S and η_{neu} from a 45 GeV run (π^- and e^-) by minimizing the spread of E_{tot}

Particle


45 GeV particles

Identification with Triple Readout

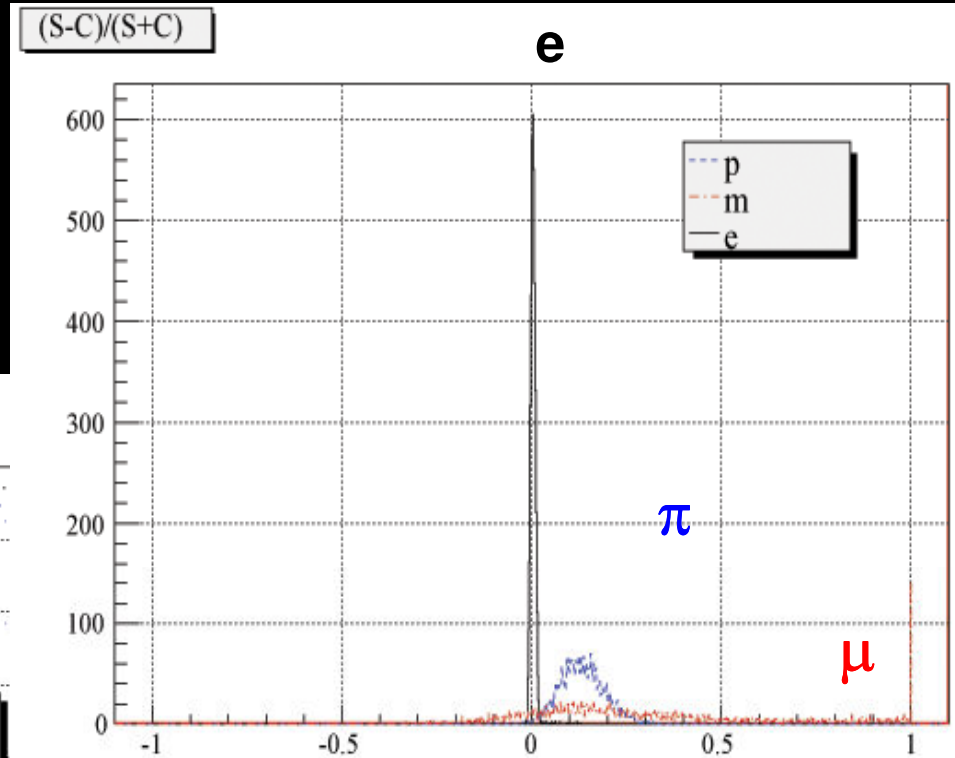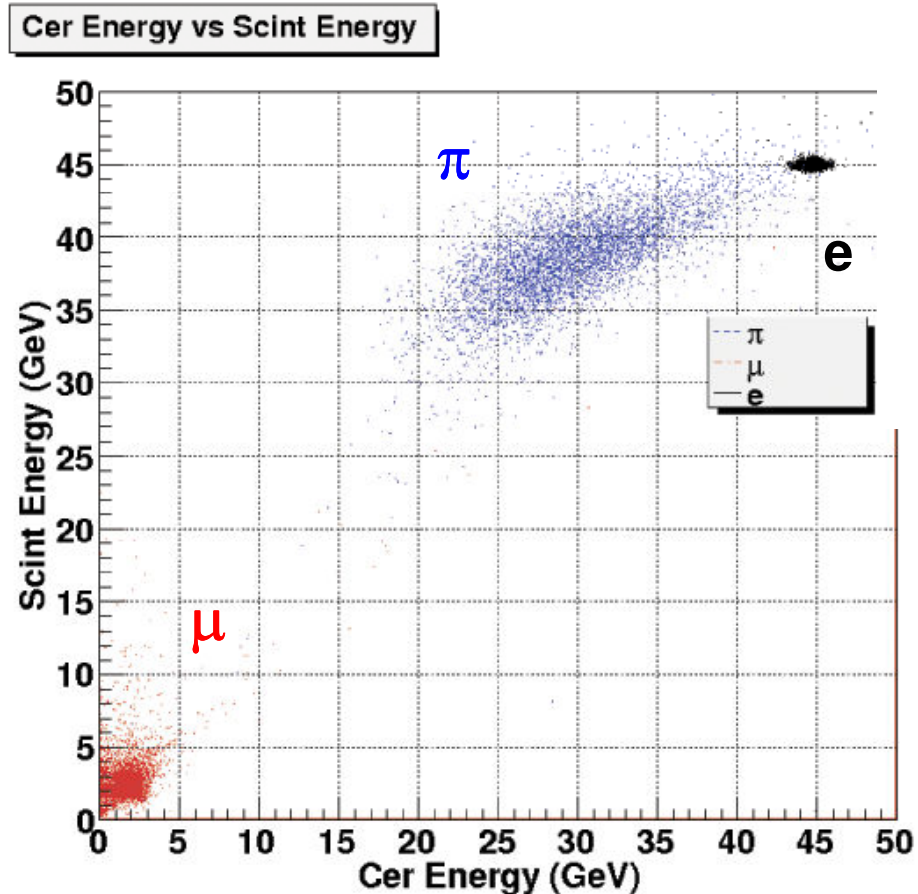

Calorimeter Response for 45 GeV e^-


Cerenkov digits

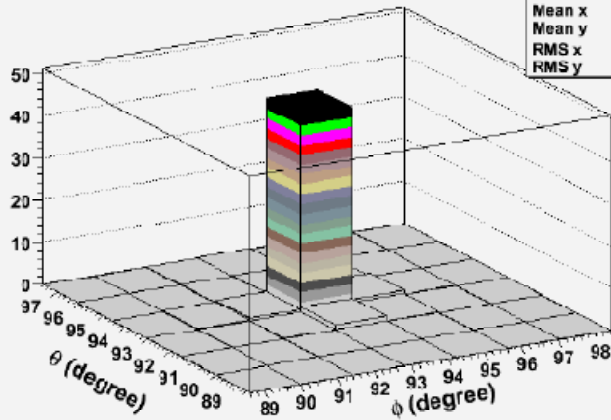

Digits_c	
Entries	15
Mean x	93.51
Mean y	93.8
RMS x	0.3815
RMS y	0.351


core

Scint digits

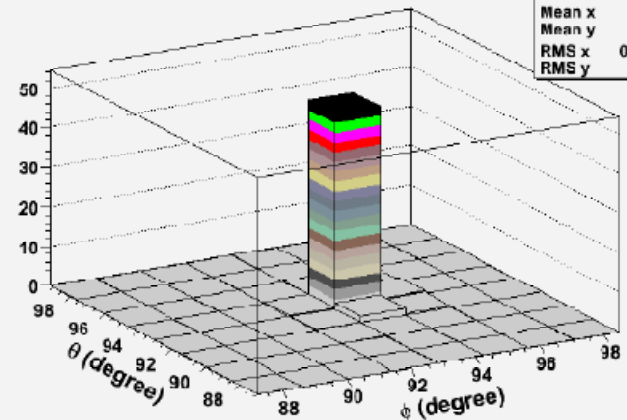

Digits_s	
Entries	20
Mean x	93.53
Mean y	93.77
RMS x	0.3208
RMS y	0.401


Cerenkov digits

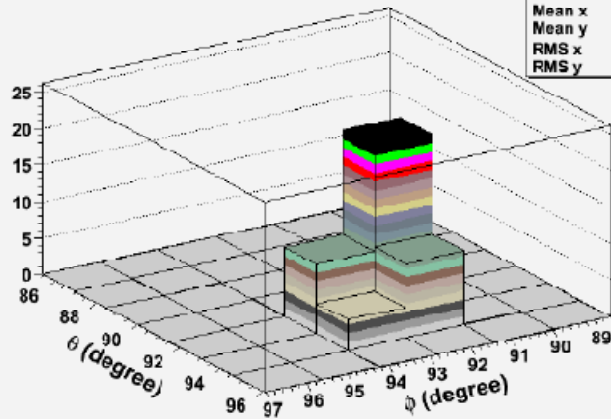

Digits_c	
Entries	12
Mean x	92.51
Mean y	92.74
RMS x	0.6526
RMS y	0.7345

boundary





Scint digits

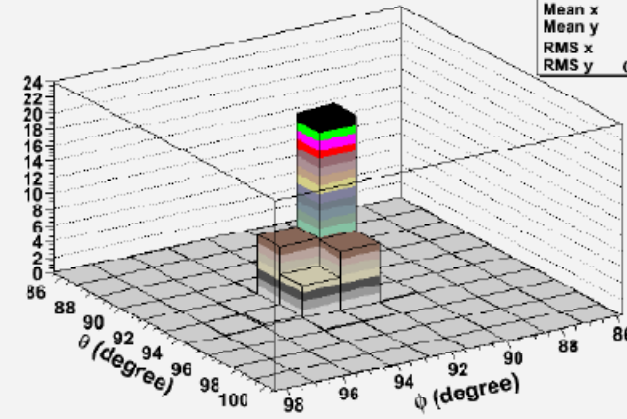

Digits_s	
Entries	28
Mean x	92.53
Mean y	92.71
RMS x	0.742
RMS y	0.7576

HCAL Optimization

Main Source of Constant Term:
tower shape

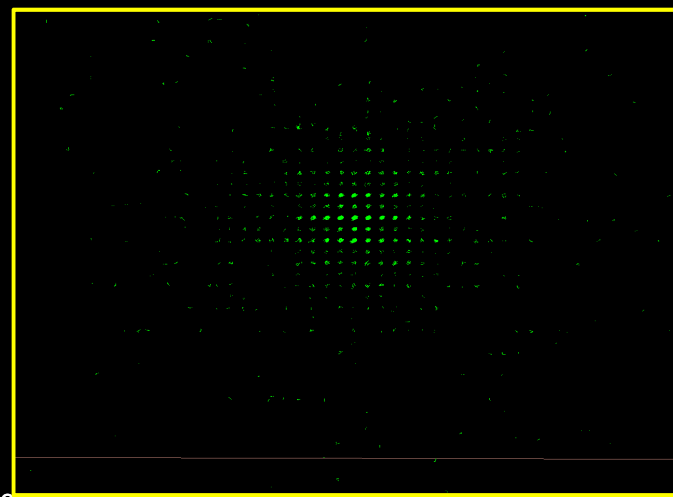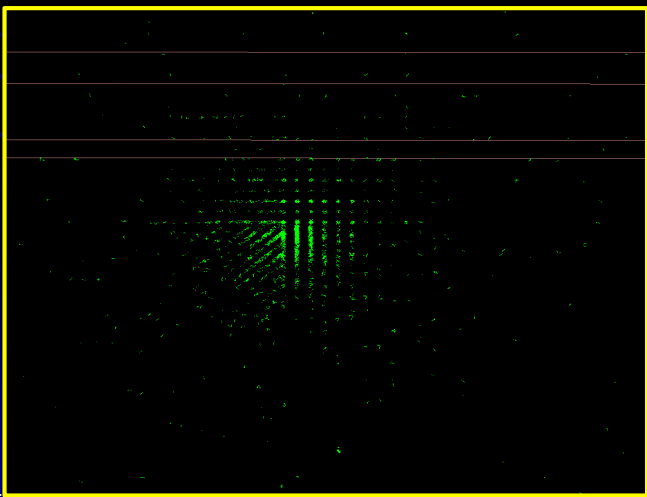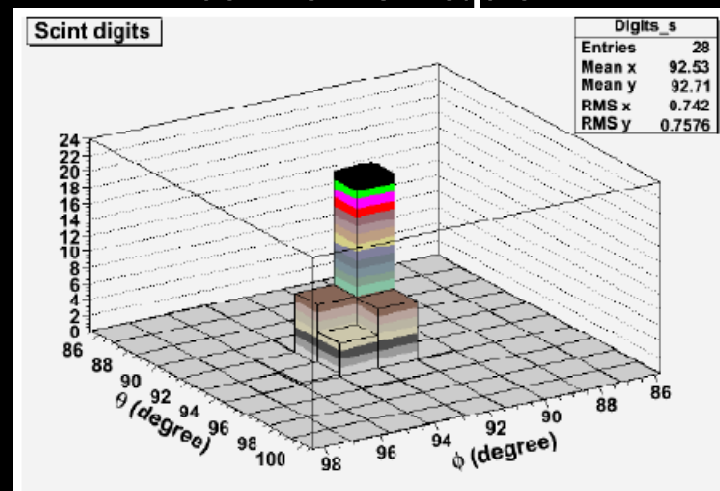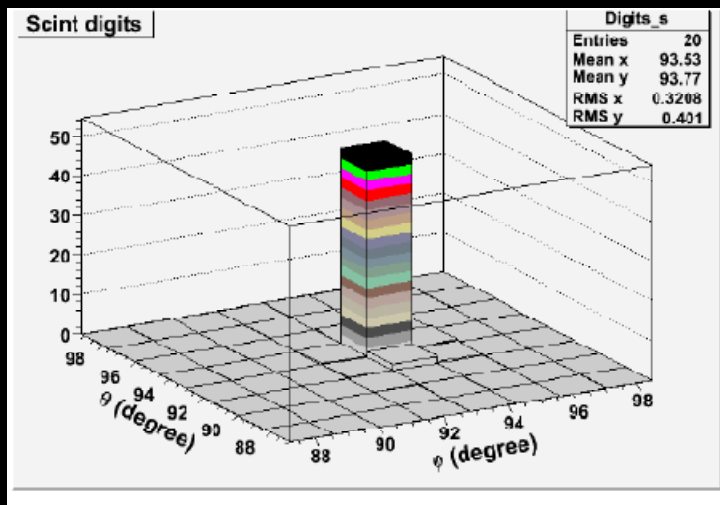


boundary


Top view of the shower of a 45 GeV e^-

core


Energy in Ecal crystals

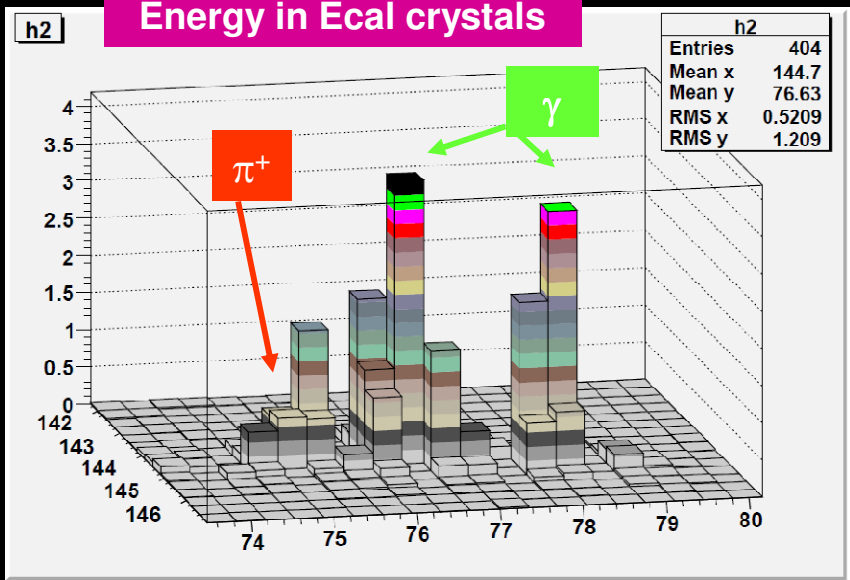


γ - γ angle

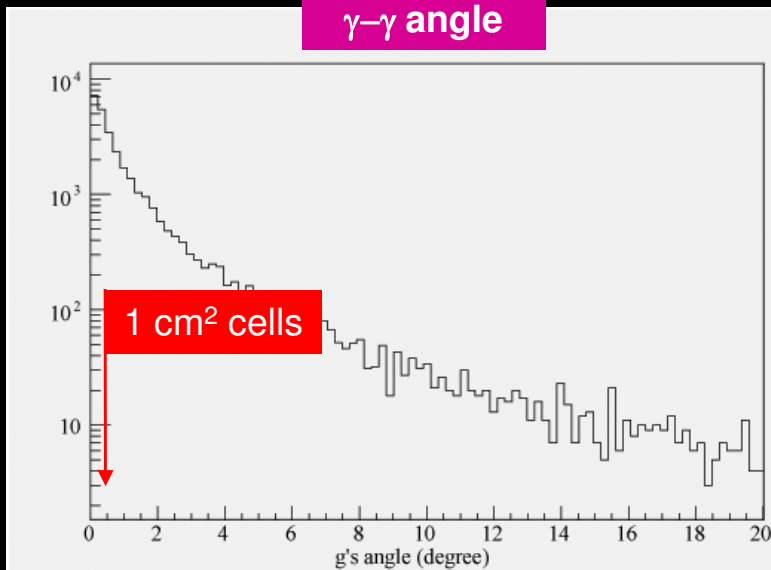

π^+ extrapolation error to Ecal


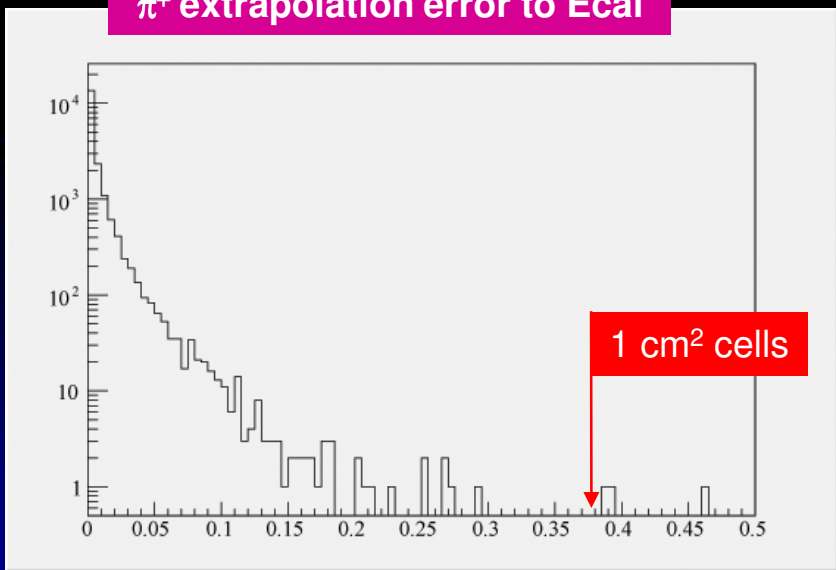


$\pi^+ - \gamma_{closest}$ angle

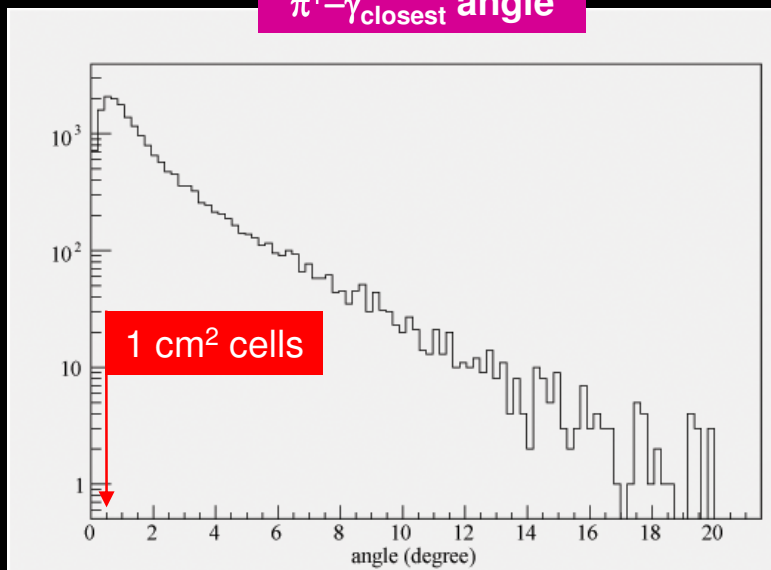

80 GeV jet with escaping particles

ILCRoot simulation

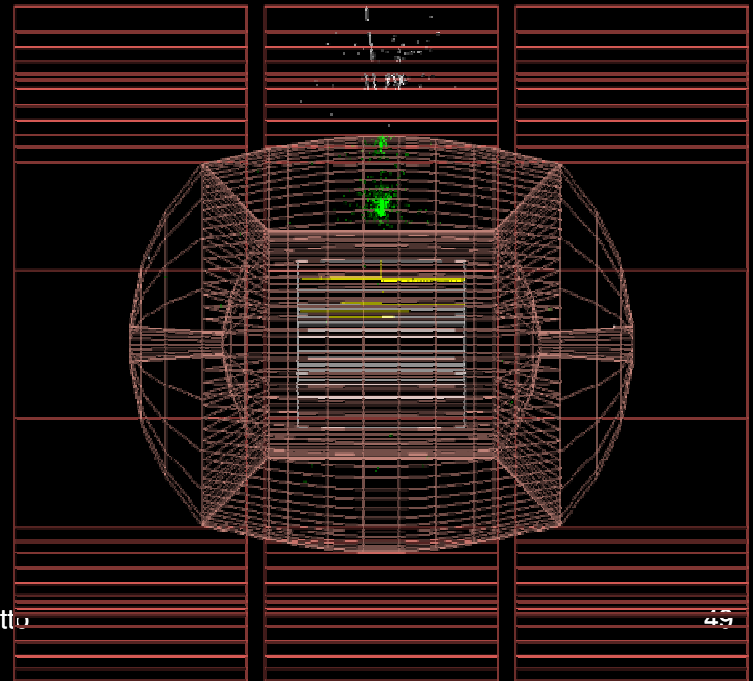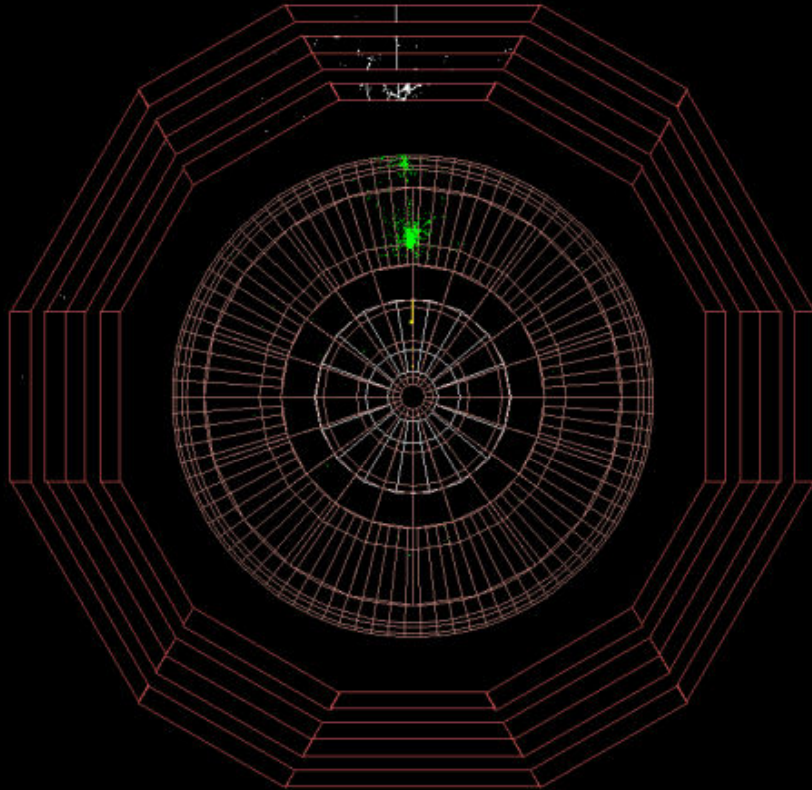

$\mu^+ \mu^-$ at 3.5 GeV/c

